

## CXT 18VRtC coaxial cable Eca Euroclass

RG-6 coaxial cable with copper inner conductor and copper-clad aluminium braid (Cu/CCA), and double shielded. An 18VRtC cable with PVC sheath.

---

<b>Ref.</b>	2139
<b>Logical ref.</b>	KE1048B
<b>EAN13</b>	8424450101278

---

### Other features

---

<b>Colour</b>	Black
<b>Length</b>	100.00 m

---

### Packaging info

---

<b>Reel</b>	100 m
<b>Box</b>	500 m
<b>Pallet</b>	6000 m

---

### Physical data

---

<b>Net weight</b>	50.00 g
<b>Gross weight</b>	50.00 g
<b>Width</b>	6.00 mm
<b>Height</b>	1,000.00 mm
<b>Depth</b>	6.00 mm
<b>Main product weight</b>	41.00 g

---

### Highlights

---

- Copper inner conductor and copper-clad aluminium braid
- Eca Euroclass

### Main features

---

- White-colour external PVC sheath
- 75 Ohm characteristic impedance
- Available in reels of different lengths

## Discover

---

### **Double-shielded Class B coaxial cable**

They provide two shielding layers and belong in EN 50117 standard Class B, according to their structural properties:

- For 5 MHz - 30 MHz =>  $TI < 15 \text{ m}\Omega/\text{m}$
- For 30 MHz - 1000 MHz =>  $SA > 75 \text{ dB}$
- For 1000 MHz - 2000 MHz =>  $SA > 65 \text{ dB}$
- For 2000 MHz - 3000 MHz =>  $SA > 55 \text{ dB}$

Where the transfer impedance (TI) defines how effective the shielding is at low frequencies, while the shielding attenuation (SA) defines it in the 30 MHz-to-3000 MHz range.

### **Double-shielded Class B coaxial cable**

They provide two shielding layers and belong in EN 50117 standard Class B, according to their structural properties:

- For 5 MHz - 30 MHz =>  $TI < 15 \text{ m}\Omega/\text{m}$
- For 5 MHz - 1000 MHz =>  $SA > 75 \text{ dB}$
- For 1000 MHz - 2000 MHz =>  $SA > 65 \text{ dB}$
- For 2000 MHz - 3000 MHz =>  $SA > 55 \text{ dB}$

Where the transfer impedance (TI) defines how effective the shielding is at low frequencies, while the shielding attenuation (SA) defines it in the 30 MHz-to-3000 MHz range.

## Mounting details

---

### DETAIL VIEW OF THE COAXIAL CABLE SECTION


**A**-Inner conductor

**B**-Dielectric

**C**-Foil

**D**-Braid

**E**-Outer sheath

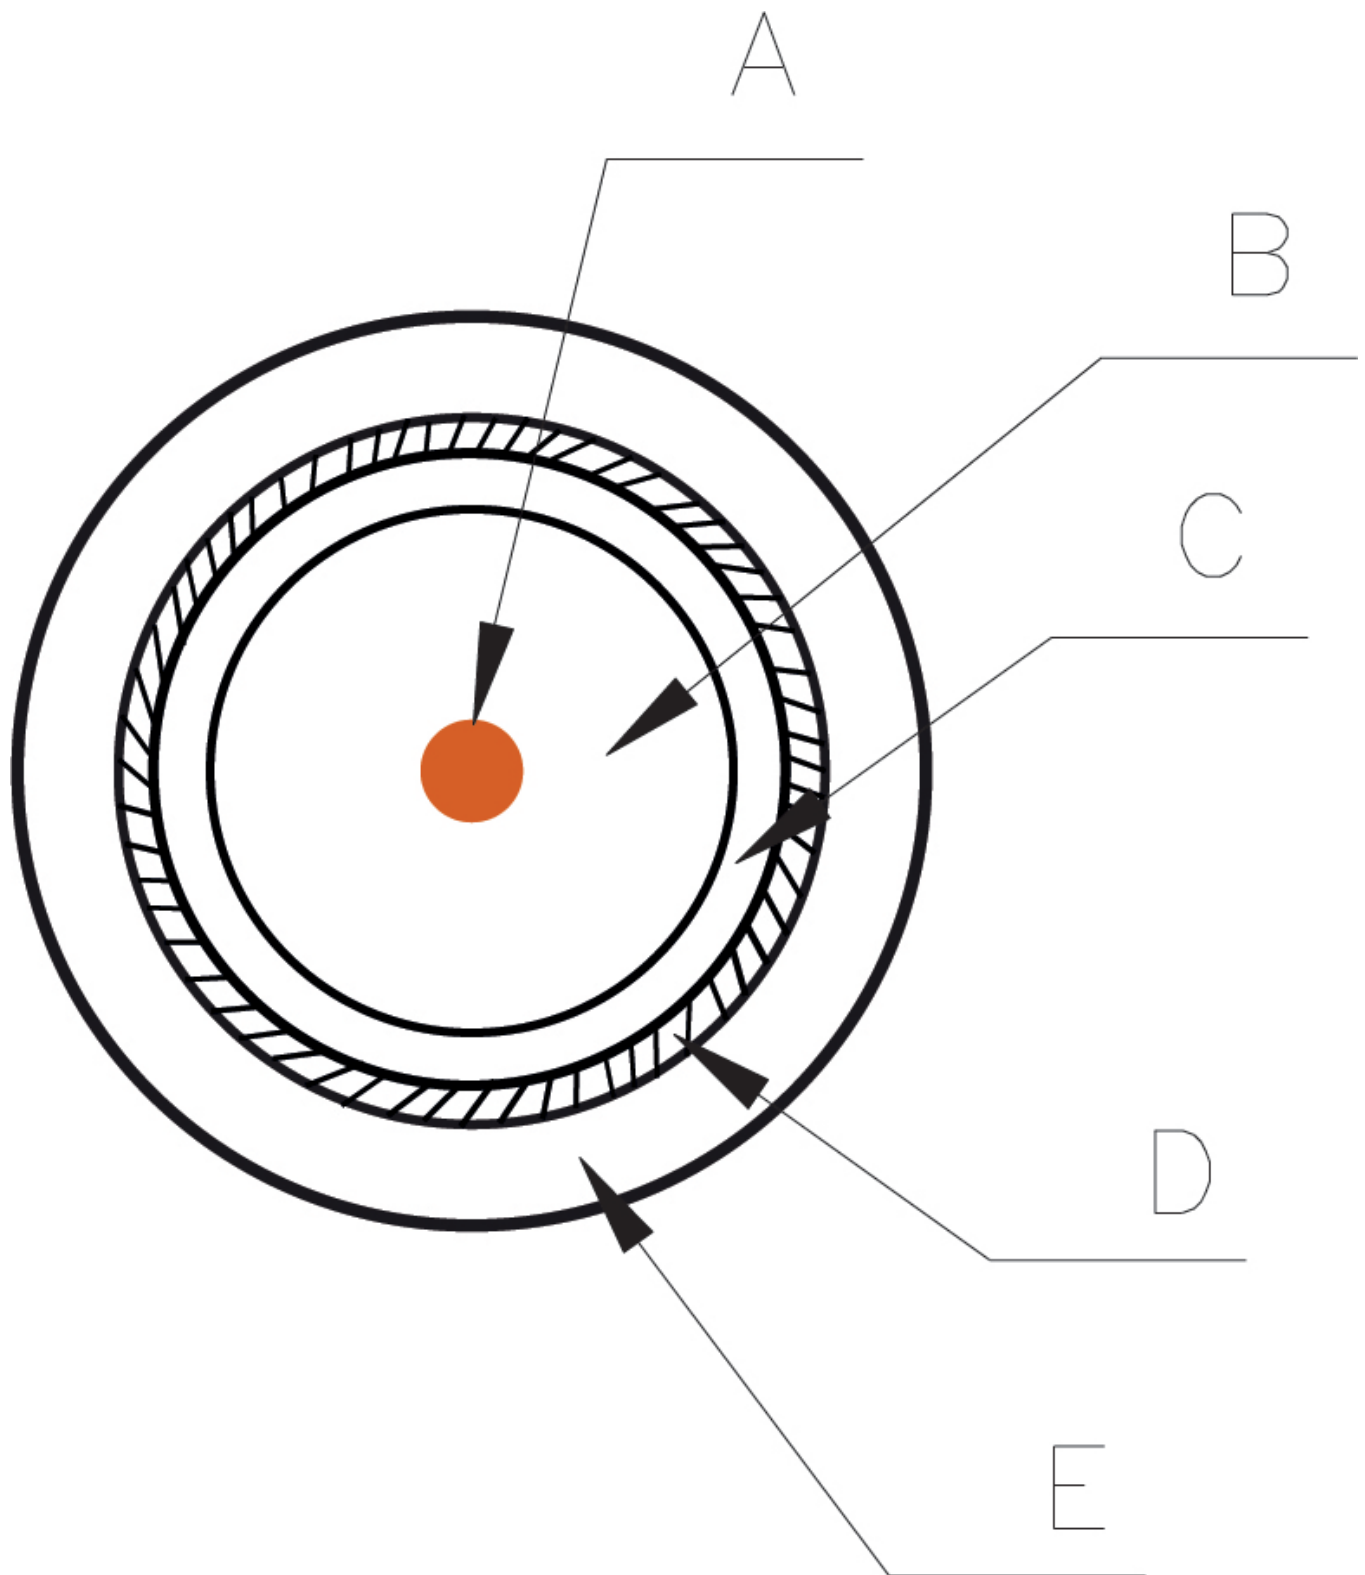

## Technical specifications : Ref. 2139

Model		CXT																				
Cable type		RG-6																				
Standard		EN 50117-9-2																				
Euroclass		Eca																				
Class		B																				
Inner conductor Diameter	mm	1																				
Inner conductor Material		Copper (Cu)																				
Inner conductor Resistance	Ω/km	< 23																				
Dielectric Diameter	mm	4.8																				
Dielectric Material		Foam polyethylene (PEE)																				
Dielectric Color		White RAL 9003																				
Overlapped foil		Copper + Polyester																				
Braid Material		Aluminium + Copper																				
Braid dimensions: No. of carriers (Nc)		16																				
Braid Dimensions: No. of strands per carrier (Ns)		3																				
Braid Dimensions: strand diameter (Ø)	mm	0.12																				
Braid Resistance	Ω/km	< 35																				
Braid Coverage	%	35																				
2nd foil		No																				
2nd foil glued to the dielectric		No																				
Petrol-jelly		No																				
Anti-migrating film		No																				
Outer sheath Diameter	mm	6.6																				
Outer sheath Material		PVC																				
Minimum bending radius	mm	33																				
Transfer impedance (5-30MHz)	mΩ/m	< 15																				
1GHz shielding	dB	> 75																				
Spark Test	Vac	3000																				
Capacitance	pF/m	55																				
Impedance	Ω	75																				
Velocity ratio	%	82																				
Operating temperature	°C	-30 ... 70																				
Frequencies		5 MHz	47 MHz	54 MHz	90 MHz	200 MHz	500 MHz	698 MHz	800 MHz	862 MHz	950 MHz	1000 MHz	1220 MHz	1350 MHz	1750 MHz	2050 MHz	2150 MHz	2200 MHz	2300 MHz	2400 MHz	3000 MHz	
Attenuation (typ.)	dB/m	0.01	0.05	0.05	0.06	0.09	0.14	0.16	0.18	0.19	0.2	0.2	0.22	0.24	0.28	0.3	0.31	0.31	0.31	0.31	0.33	0.36
Return losses (min.)	dB	23	23	23	23	23	20	20	20	20	20	20	18	18	18	16	16	16	16	16	16	16