



DK6000 data cable U/UTP Cat 6 Eca PVC 23AWG

Category-6 and Eca Euroclass data cable, U/UTP type (Unfoiled), with copper conductor and PVC sheath, white colour (RAL 9010).

Ref.	2199
Logical ref.	CAT6P305W
EAN13	8424450021996

Other features

Colour	White
Length	305.00 m

Packaging info

Box	305 m
------------	-------

Physical data

Net weight	40.00 g
Gross weight	40.00 g
Width	6.00 mm
Height	1,000.00 mm
Depth	6.00 mm
Main product weight	36.00 g

Highlights

- U/UTP Unfoiled UTP Cable
- Solid copper inner conductor (23AWG)
- Compatible with PoE/PoE+ (Power over Ethernet) technology, allowing the cable to power network devices
- PE (Polyethylene) copper conductor insulation, 0.95mm thick

- PVC (polyvinyl chloride) outer sheath, 0.50mm thick and 6.2mm diameter
- 72% nominal speed
- Certified according to the applicable standards as defined in the available declarations of conformity and performance
- Tested and approved by the Intertek (ETL Verified Mark) laboratory according to the available certification

Discover

Category 6

Data cable category Cat 6 complies with the standard for Gigabit Ethernet and it is backwards compatible, with the standards of the inferior categories (Cat 5/5e and Cat 3). Category 6 evolves over category 5E, allowing to achieve transmission frequencies of up to 250 MHz (in each pair) and 1 Gbps of throughput. It includes characteristics and specifications to avoid crosstalk and noise. This type of data cable can be used in 10BASE-T, 100BASE-T and 1000BASE-T (Gigabit Ethernet) compliant systems.

Our category 6 cables are characterized:

- Comply with TIA/EIA-568B.2-1
- Crucifix type padding
- Transfer rate up to 1Gbps
- Frequency range of up to 250 MHz and up to 400MHz in some references
- Includes rip cord to make it easier to strip the cable
- Nominal impedance of 100 ohms
- Maximum resistance per conductor below 9.38 ohms/100m

Compatibility of RJ45 connectors with Televes data cables:

Reference	219602	219701	219901	219910	212201	2123	212302	212305	212310	212101	219302	219312	219313	219322
Female connectors	209901/209907	OK	OK	OK	OK	OK	OK	OK	OK	X	X	X	X	X
	209905	OK	OK	OK	OK	OK	OK	OK	OK	X	X	X	X	X
	209921/209925	OK	OK	OK	OK	OK	OK	OK	OK	X	X	OK	OK	X
	209926	OK	OK	OK	OK	OK	OK	OK	OK	X	X	OK	OK	X
	209903	OK*	OK*	OK	OK*	OK*	OK*	OK*	OK*	OK	X	X	X	X
	209923	OK*	OK*	OK	OK*	OK*	OK*	OK*	OK*	OK	OK	OK*	OK*	OK
	209929/209501	OK*	OK*	OK	OK*	OK*	OK*	OK*	OK*	OK	OK	OK*	OK*	OK
Male connectors	209902	OK	OK	OK	OK	OK	OK	OK	OK	X	X	X	X	X
	209961/209962	OK	OK	OK	OK	OK	OK	OK	OK	X	X	X	X	X
	209904	OK*	OK*	OK	OK*	OK*	OK*	OK*	OK*	OK	X	X	X	X
	209906	OK	OK	OK	OK	OK	OK	OK	OK	X	X	X	X	X
	209965/209966	OK	OK	OK	OK	OK	OK	OK	OK	X	X	X	X	X
	209922	OK*	OK*	OK	OK*	OK*	OK*	OK*	OK*	X	X	OK	OK	X
	209924	OK*	OK*	OK	OK*	OK*	OK*	OK*	OK*	OK*	OK	OK*	OK*	OK

OK Compatible

OK* Compatible, but there are better choices


X Incompatible

** Mechanical compatibility

Mounting details

DETAIL VIEW OF THE DATA CABLE SECTION

- A. Inner conductor
- B. Inner conductor isolation
- C. Crucifix Filler
- D. Outer sheath
- E. Rip cord

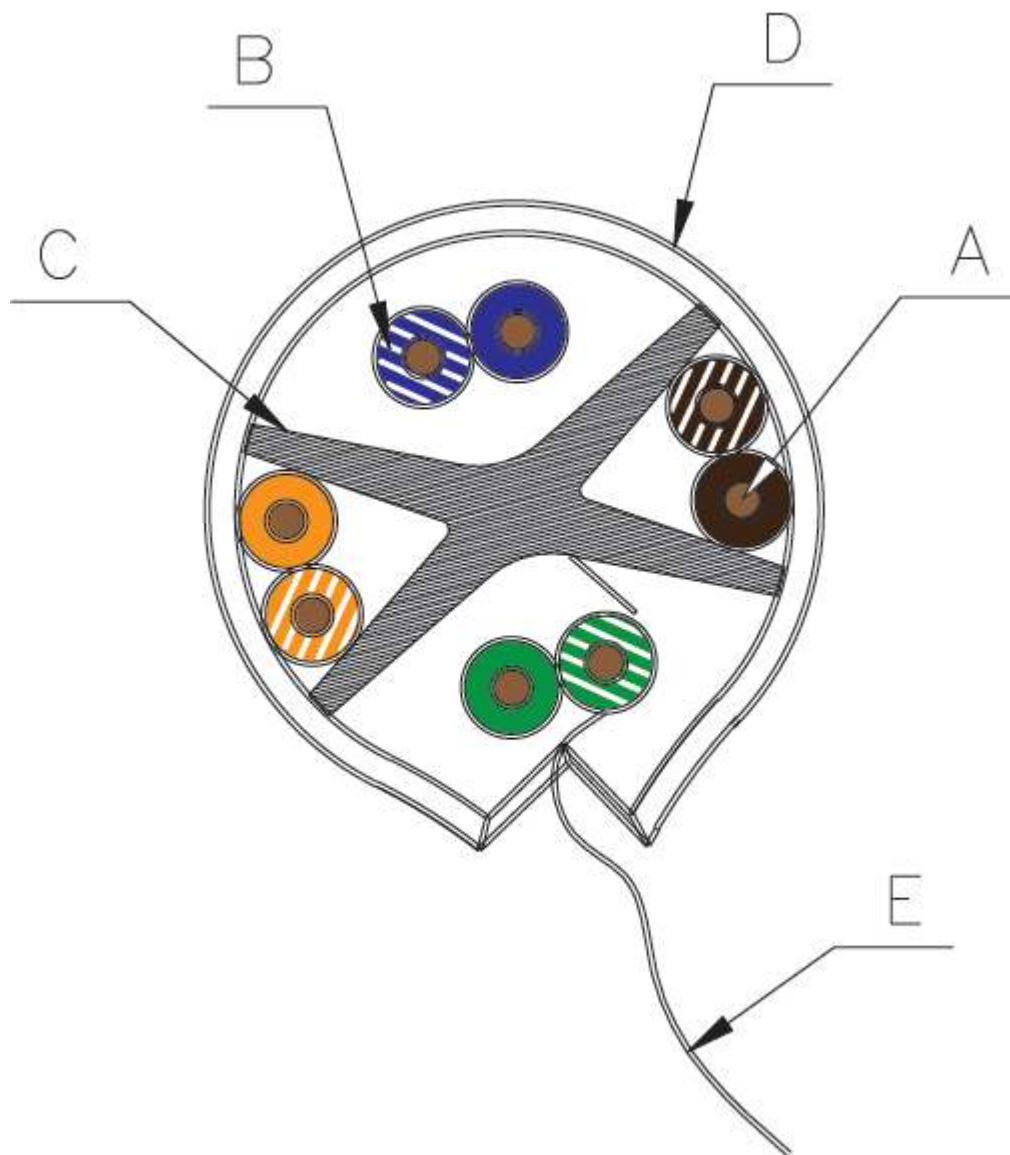

Technical specifications : Ref. 2199

Type		U/UTP													
Euroclass		Eca													
Categorie		Cat 6													
Transmission bandwidth		250MHz													
Transfer rate		1Gbps													
Conductor Diameter	mm	0.55													
Conductor Material		Solid copper													
Conductor type AWG		23													
Conductor isolation Diameter	mm	0.95													
Conductor isolation Material		Polyethylene													
Crucifix filler		Yes													
Outer sheath Diameter	mm	6.2													
Outer sheath Material		PVC													
Outer sheath Thickness	mm	0.5													
Rip cord		Yes													
Spark Test	Vac	3000													
Nominal impedance	Ω	100													
Conductor resistance	Ω/100m	< 9.38													
Nominal speed	%	72													
Working voltage	V	300													
Operating temperature	°C	-30 ... 70													
Frequencies		0.772 MHz	1 MHz	4 MHz	8 MHz	10 MHz	16 MHz	20 MHz	25 MHz	31.25 MHz	62.5 MHz	100 MHz	125 MHz	200 MHz	250 MHz
Attenuation (max.)	dB/100m	--	2	3.8	5.3	6	7.6	8.5	9.5	10.7	15.4	19.8	--	29	32.8
Attenuation (typ.)	dB/100m	1.8	2	3.8	5.4	6	7.6	8.5	9.6	10.7	15.5	19.9	22.4	29.2	33
ACR-N (typ.)	dB/100m	--	72.3	61.5	55.5	53.3	48.6	46.3	43.8	41.2	32	24.5	--	10.8	5.5
PS ACR-N (typ.)	dB/100m	--	70.3	59.5	53.5	51.3	46.6	44.3	41.8	39.2	30	22.5	--	8.8	3.5
Return losses (typ.)	dB	--	20	23	24.5	25	25	25	24.3	23.6	21.5	20.1	--	18	17.3