



EasyF 4W tap 5...2400 MHz 25 dB

Tap equipped with 4 tap ways and EasyF connection system for SMATV signals, using a compact design and an efficient electrical behaviour. Due to the tap losses (25 dB), installation on floors 6 to 8 is recommended.

Conceived for indoor installation, it can also be used outdoors with a case (ref. 4177).

Supplied in 10-unit boxes.

Ref.	544702
Logical ref.	EFA425
EAN13	8424450143797

Packaging info

Box	10 pcs.
Bucket	300 pcs.

Physical data

Net weight	114.00 g
Gross weight	114.00 g
Width	80.00 mm
Height	55.00 mm
Depth	14.00 mm
Main product weight	114.00 g

Highlights

- EasyF connection system: easy to install, savings on mounting
- Made of Zamak, high shielding

- Outstanding reliability: automated manufacturing using new generation micro-components

Main features

- Improves through losses
- Outstanding electrical behaviour: impulsive noise reduction
- Grounding screw provided
- Bidirectional DC pass between input and pass output

Discover

EasyF connection system: simplicity and savings

EasyF is an innovative connection concept where the inner conductor of the coaxial cable is directly inserted in the device, thus improving connection reliability. Thanks to the absence of F connectors, the chassis can be reduced and the connection of two cables secured with a single screw.

- Real time savings: speeding the installation is possible without the need for coaxial cable termination. Furthermore, there is no need for screwing the connectors on the device, which is sometimes difficult when there is little room
- Connection reliability: the clamp holding the cables prevents the coaxial cable to come off
- Cost savings: no additional connectors are required (neither F nor IEC)
- Space optimization: inputs and outputs are always on the same side of the device to prevent coaxial cables from bending, and to make working inside cabinets and register boxes easier
- Very easy three-step mounting: only screwing and unscrewing the covers is required to connect both cables:

1. Unscrew the device's cover to access the connection
2. Insert the previously stripped coaxial cables
3. Close the cover and screw to ensure connection


Learn more about EasyF system reliability

With EasyF, the connection between the coaxial cable and the device is carried out using an automated system for contact insertion of the inner conductor, without any soldering.

- Always as new: the device's operating life increases when the factor of solder wearing out with time is removed
- Failure rate reduction: usually produced as a result of cold soldering joints
- Electromagnetic behaviour optimization: for high frequencies
- Our commitment with environment is reinforced: pollution caused by the welding process is eliminated and production power consumption is reduced

Application example

Distribution network and Inner network for users.

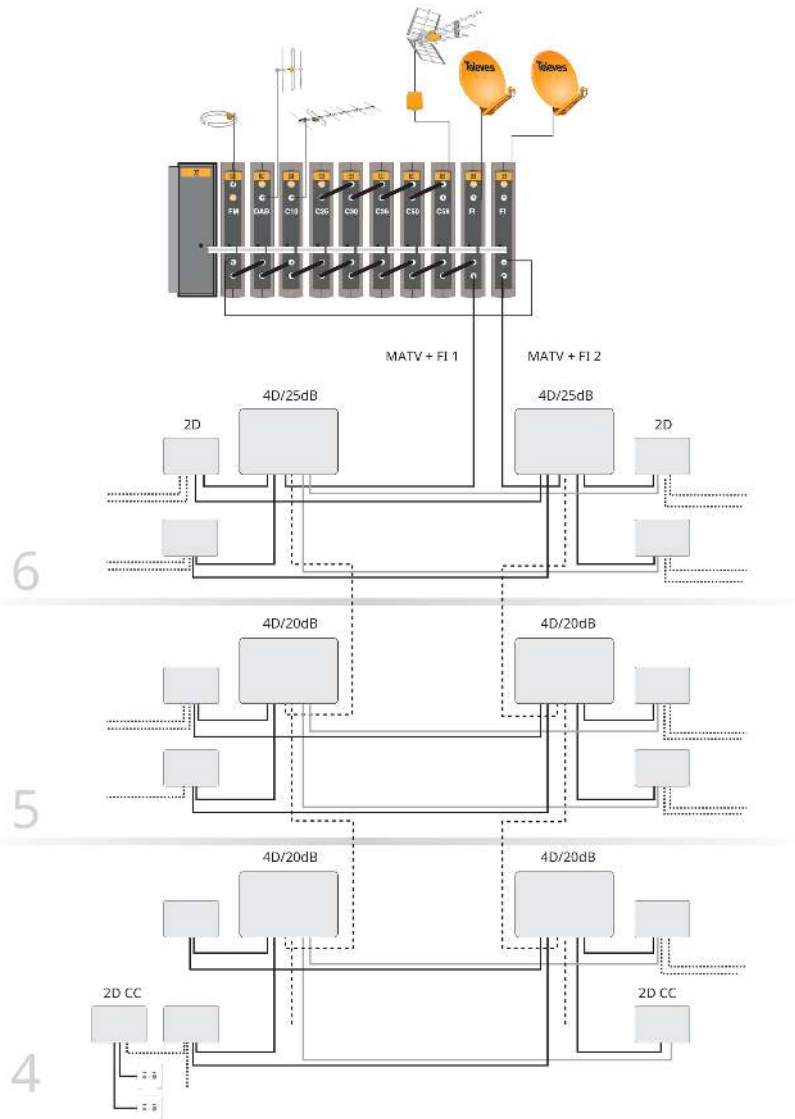

Technical specifications : Ref. 544702

Frequency range	MHz		5 ... 2400
Number of outputs			4
Floors			6...8
Inputs/Bands		TERR	SAT
Through losses	dB	0.5	0.5 ... 2.1
Tap losses	dB	26	24
Rejection between taps	dB	> 30	> 25
Connectors			"EasyF" type
Voltage max.	V		40
Max. current	mA		300
DC pass			OutIn