


# NEVOSWITCH TAP 5x

## 8dB TAP LOSSES

REF.	ART. NR.	DESCRIPTION	EAN 13
714906	AZS58G	NEVOSWITCH TAP 5x5x5 "F" 8dB	8424450184998

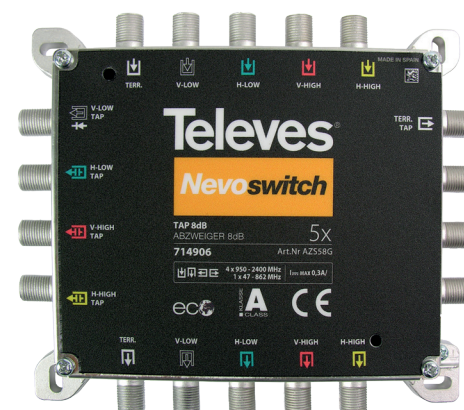

**+** **NevoSwitch tap** has been designed to complement the NevoSwitch range, so any facility can be easily extended to more users, optimizing every output signal. Due to the taps we can split the line signal to the users and also distribute the signal to the rest of the installation.

- 8 dB tap losses.
- **Small** size and **compact** design.
- Chassis made of **zamak**: radiation immune.
- It allows **DC pass** (DiSEqC, USALS).
- **Low through losses**.
- Low consumption **ECO mode**.

**i**

REF.	ART. NR.	mm	g	U./Packing
714906	AZS58G	137 x 120 x 30	400	1 / box

**e**

Reference / Art. Nr.		714906 / AZS58G	
Frequency range	MHz	SAT	950 ... 2400
		RF	47 ... 862
Tap losses	dB	SAT	3.5 ± 0.8
		RF	3.5 ± 0.4
Through losses	dB	SAT	8 ± 1.5
		RF	8 ± 1
Isolation	dB	H/V Users	>25
DC pass		In - Out / Out - In	
Maximum total consumption	mA	-	
Temperature range	°C	-5 ... +45	
Protection level	IP	20	
Weight	g	400	
Dimensions	mm	137 x 120 x 30	