



## RF Amplifier

Multiband amplifier with high amplification power for the signals processed in T.OX headends.

<b>Ref.</b>	5575
<b>Logical ref.</b>	UAMP44
<b>EAN13</b>	8424450139288

### Packaging info

<b>Box</b>	1 pcs.
<b>Bucket</b>	18 pcs.


### Physical data

<b>Net weight</b>	868.00 g
<b>Gross weight</b>	868.00 g
<b>Width</b>	50.00 mm
<b>Height</b>	219.00 mm
<b>Depth</b>	180.00 mm
<b>Main product weight</b>	830.00 g


### Main features

- Low second and third order distortion, which provide a high output voltage (typical values around 126 dB $\mu$ V)
- Equipped with two signal inputs, which allow the mixing of the channels of its own headend with channels coming from other sources
- Equipped with a test output

## Application example

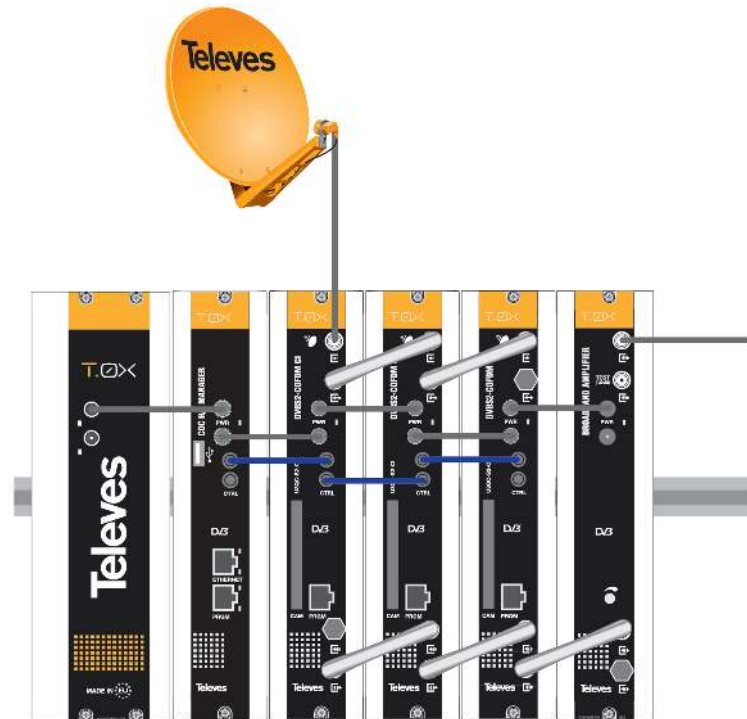

## Graphic documentation



**Block diagram**