



## 24V-5A Power supply for several modules, 196-264Vac

Flyback-type, high-power and high-performance (>85%) switched-mode power supply. Provides 5 A at 24 V (120 W).

<b>Ref.</b>	5629
<b>Logical ref.</b>	UPSU120
<b>EAN13</b>	8424450139295

### Packaging info

<b>Box</b>	1 pcs.
------------	--------

### Physical data

<b>Net weight</b>	1,471.00 g
<b>Gross weight</b>	1,471.00 g
<b>Width</b>	71.00 mm
<b>Height</b>	219.00 mm
<b>Depth</b>	165.00 mm
<b>Main product weight</b>	1,383.00 g


### Highlights

- Equipped with two outputs monitored by LED diodes that indicate the status of the provided voltages
- Overload and short-circuit detection
- Maximum current limited to 4 A per output
- Equipped with protection against output-voltage variation

## Application example

---

Rack mount.

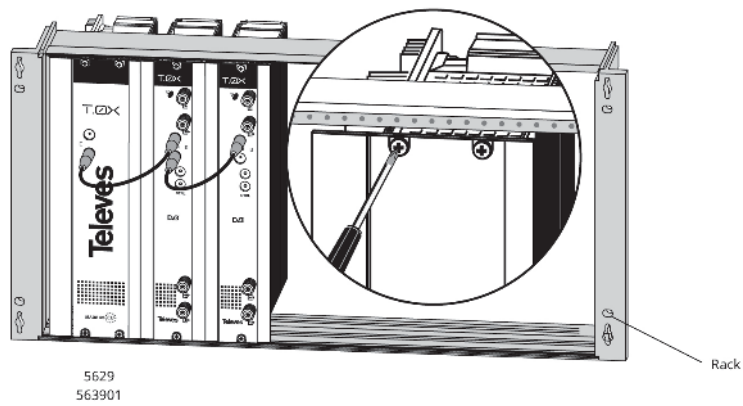

## Graphic documentation

---



**Block diagram**

## Technical specifications : Ref. 5629

Plug type		EU
Input voltage	Vac	196 ... 264
Mains frequency		50 Hz / 60 Hz
Max. power	W	140
Output voltage	Vdc	24
Max. output current	A	5
Max. output power	W	120
Operating temperature	°C	-5 ... 45
Protection index (IP)		20