



## "F" Power Supply Unit 24 V - 130 mA, 2 outputs

Domestic 24 V-power supply (130 mA) that powers equipment through the input coaxial cable while allowing the transmission of the TV signal. Included in the installation to power either mast amplifiers or a BOSS system. Furthermore, it is equipped with two outputs.

---

<b>Ref.</b>	5504
<b>Logical ref.</b>	NT24F
<b>EAN13</b>	8424450139400

---

### Packaging info

---

<b>Box</b>	1 pcs.
<b>Bucket</b>	109 pcs.

---

### Physical data

---

<b>Net weight</b>	280.00 g
<b>Gross weight</b>	280.00 g
<b>Width</b>	146.00 mm
<b>Height</b>	54.00 mm
<b>Depth</b>	35.00 mm
<b>Main product weight</b>	220.00 g

---

### Highlights

---

- High-performance switched-mode power supply: saves up to 40% power consumption
- Low-impact visual design and limited size
- "F" connectors

- Fully automated manufacturing, subject to the most stringent quality controls


## Main features

---

- Can be wall-mounted using screws
- Through losses may vary depending on whether 1 or 2 outputs are used

## Application example

---

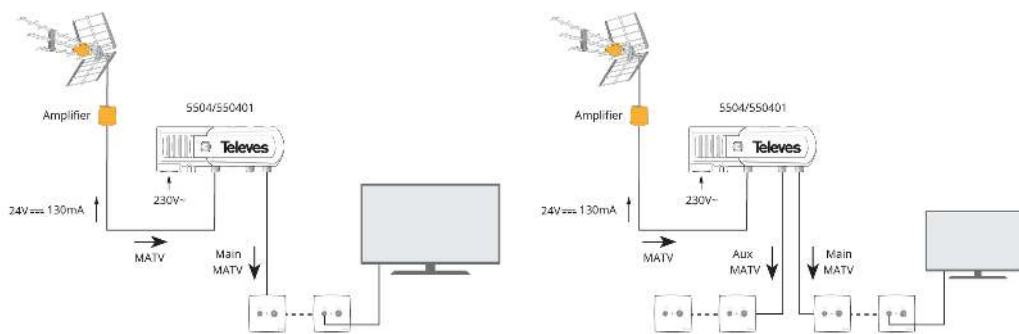

## Technical specifications : Ref. 5504

Plug type		EU
Number of outputs		2
Frequency range	MHz	5 ... 862
Insertion losses: 1 output	dB	1.5
Insertion losses: 2 outputs	dB	4
Output voltage	Vdc	24
Max. output current	mA	130
Input voltage	Vac	207 ... 253
Mains frequency		50 Hz / 60 Hz
Max. current	mA	35
Max. power consumption	W	4.4
Operating temperature	°C	-5 ... 45
Protection index (IP)		20