



F 8W Splitter 950...2150 MHz Active 5...7 dB

Active 8-way Splitter and F connectors for satellite signals.

Indoor installation

Ref.	7402
Logical ref.	SAV8VST
EAN13	8424450074022

Packaging info

Box	1 pcs.
Bucket	116 pcs.

Physical data

Net weight	222.00 g
Gross weight	222.00 g
Width	140.00 mm
Height	97.00 mm
Depth	25.00 mm
Main product weight	222.00 g


Main features

- F connectors
- Gain: 1...4 dB
- DC pass from the outputs to the input

Application example

Notes

- 1.- Max. cable run from amplifier 50 m.
- 2.- It is essential to use high quality tape and braid coaxial cable with a minimum center core of 1 mm.
- 3.- If more than one dwelling is connected use either isolated outlets or central earthing incorporated on input and output. (Refer to cenelec or other requirements).
- 4.- No handling with power apply.

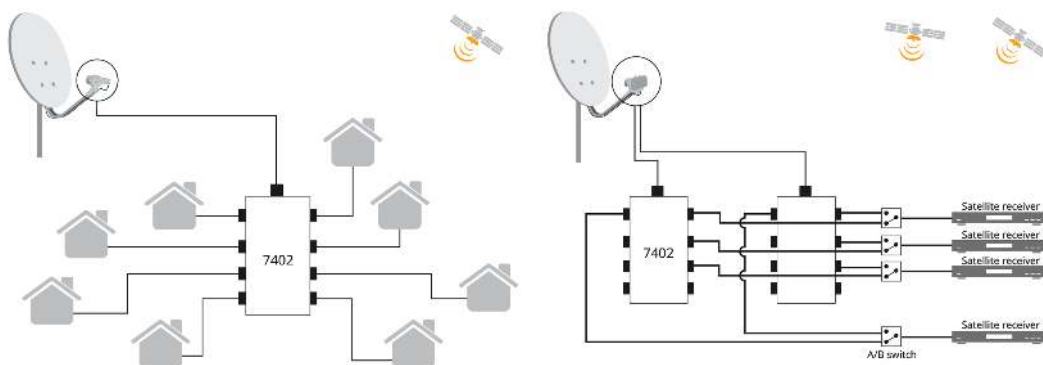

Technical specifications : Ref. 7402

Frequency range	MHz	950 ... 2150
Number of outputs		8
Inputs/Bands		SAT
Through losses	dB	10
Connectors		"F" female
Max. current	mA	300
DC pass		OutIn