

# DAT BOSS MIX antenna BI/BIII/UHF

If the DAT BOSS can't receive it, nothing can

Intelligent antenna including the BOSS Techsystem, designed for quality reception of mixed BI/BIII/UHF signals, optimizing the rejection of interference from other bands.

The antenna design provides the base UHF structure with several elements, thus allowing a combined reception of the three bands: dipole and two reflectors specifically designed for BIII, and a specific dipole for BI.

Ref.	148220
EAN13	8424450206720

#### Other features

Colour	Orange
<b>Power Supply Unit</b>	Not included
Supply method	Single packing

#### Physical data

Net weight	2,640.00 g
Gross weight	3,130.00 g

#### Packing

Box	1 pcs.
Pallet	25 pcs.
Carton	25 pcs.

### Highlights

- High dynamic range: it allows the reception of high-quality TV in a variety of critical situations, from areas where signals are very weak to installations with high signal levels
- Expanded DTT coverage area: up to 27% higher than previous models
- More stable signal reception: it supports signal variations or fading with no effect on the TV installation
- Optimal C/N: thanks to a noise figure of only 1.2dB that enhances the received signal quality
- Very high gain: TForce technology provides BOSS with an increase in gain of up to 13dB

#### Main features

- The DAT design, based on 3 Yagi antennas with asymmetric directors, provides great directivity as well as an optimal anti-echo radiation pattern
- Special double-U dipole: it's open/close format provides optimal frequency response flatness
- A fully shielded switch box protects the BOSS system from impulsive noise; grounded for full protection against electrical discharge
- Manufactured in aluminium (stainless) for a long service life
- Fully automated manufacturing in Europe under the most stringent quality controls: a synonym of high reliability
- Two work mode options: Intelligent low power consumption mode or passive mode (lack of power supply).

#### Discover

#### **TForce technology:**


Televes transitions from the traditional silicon era into a new era of electronic component design, allowing integrated circuits to be precisely manufactured for microwave frequency bands. Utilizing "State of the Art" MMIC technology TForce is manufactured using semiconductor compounds such as gallium arsenide (GaAs), providing the resulting products with unparalleled features and performance

Televes has reinvented the antenna concept. Until now, an antenna was just the reception component

of a TV installation in which gain and directivity were the main features. The introduction of a smart device like BOSS provides the antenna with the capacity to receive very weak signals without the risk of being affected by very strong signals, the result is a dynamic balance between weak and strong signals that provides optimum signal levels at all times: the "dynamic range" concept turns out to be the most outstanding among quality parameters.

The creation of TForce with BOSS technology using MMIC components is an extraordinary milestone in the optimization of the dynamic range. The technology that allowed the reception of lost signals from distant satellites is now allowing the enhancement of the coverage range in DTT installations.

#### Graphic documentation

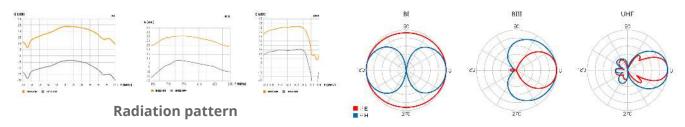

**Radiation pattern** 

### **Technical specifications**: Ref. 148220

Bands		BI		BIII		UHF		
Frequency range	MHz	54 88		174 216		470 698		
Channels		2 6		7 13		14 51		
BOSS mode		ON	OFF	ON	OFF	ON	OFF	
Gain	dBi	24	-3	36.5	8.5	42	16	
Output level		Auto*1		Auto*2		Auto*3		
Noise figure		3		2		2		
Powering	Vdc	12 24	0	12 24	0	12 24	0	
Max. current		45		45		45		
Beamwidth	0	30		30		30		
Wind load (@130Km/h)	N	120						
Wind load (@150Km/h)	N	165						

- \*1 The gain is automatically adjusted according to the level of output
- \*2 The gain is automatically adjusted according to the level of output
- \*3 The gain is automatically adjusted according to the level of output