



HR (High Rejection) LTE/4G filter 47...782 MHz (Ch.59), "EasyF" connection

LTE/4G filter with high rejection against interference from channel 59 up. Suitable for outdoor use.

Ref.	405402
Logical ref.	TSKM59LTE
EAN13	8424450168448

Other features

Colour	Orange
---------------	--------

Packaging info

Box	1 pcs.
Carton	10 pcs.
Bucket	100 pcs.

Physical data

Net weight	199.00 g
Gross weight	199.00 g
Width	88.00 mm
Height	76.00 mm
Depth	42.00 mm
Main product weight	199.00 g

Highlights

- Low insertion losses to avoid any impacts on the distributed signals
- EasyF system: easy, quick and safe connectorization
- Ultra-small ergonomic design
- Fully automated manufacturing, subject to the most stringent quality controls

- High-screening Zamak chassis

Main features

- Resistant ABS-plastic case for outdoor installation
- Orange colour

Discover

EasyF connection system: simplicity and savings

EasyF is an innovative connection concept where the inner conductor of the coaxial cable is directly inserted in the device, thus improving connection reliability. Thanks to the absence of F connectors, the chassis can be reduced and the connection of two cables secured with a single screw.

- Real time savings: speeding the installation is possible without the need for coaxial cable termination. Furthermore, there is no need for screwing the connectors on the device, which is sometimes difficult when there is little room
- Connection reliability: the clamp holding the cables prevents the coaxial cable to come off
- Cost savings: no additional connectors are required (neither F nor IEC)
- Space optimization: inputs and outputs are always on the same side of the device to prevent coaxial cables from bending, and to make working inside cabinets and register boxes easier
- Very easy three-step mounting: only screwing and unscrewing the covers is required to connect both cables:

1. Unscrew the device's cover to access the connection
2. Insert the previously stripped coaxial cables
3. Close the cover and screw to ensure connection


Learn more about EasyF system reliability

With EasyF, the connection between the coaxial cable and the device is carried out using an automated

system for contact insertion of the inner conductor, without any soldering.

- Always as new: the device's operating life increases when the factor of solder wearing out with time is removed
- Failure rate reduction: usually produced as a result of cold soldering joints
- Electromagnetic behaviour optimization: for high frequencies
- Our commitment with environment is reinforced: pollution caused by the welding process is eliminated and production power consumption is reduced

Graphic documentation

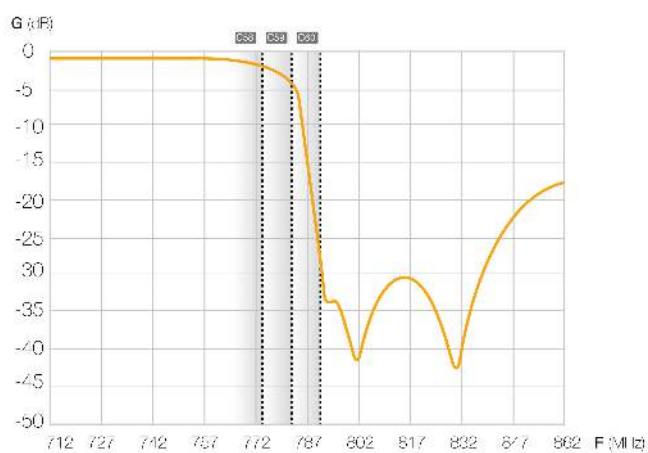

Frequency response

Technical specifications : Ref. 405402

Rejected band	MHz	791 ... 862
Rejected band attenuation	dB	> 26
Pass band	MHz	47 ... 782
Pass band attenuation	dB	1
Number of inputs		1
Number of outputs		1
Connectors		"EasyF" type
Operating temperature	°C	-5 ... 45
Protection index		23