



## MicroKom line multiband amplifier (1 GHz - Gain: 30 dB/35 dB) Active/passive return channel: 5-85 MHz

Class-4 line multiband amplifier, designed for the distribution of multimedia services in small or medium-size buildings. Characterized by providing plug-in jumpers in both the forward and the return channels.

The forward channel's gain is 30 dB/35 dB; the return channel may be either passive or active (28 dB).

The forward channel, up to 1220 MHz, makes it compatible with DOCSIS 3.1.

<b>Ref.</b>	534432
<b>Logical ref.</b>	KVE3035RK85
<b>EAN13</b>	8424450269770

### Packaging info

<b>Box</b>	1 pcs.
------------	--------

### Physical data

<b>Net weight</b>	492.00 g
<b>Gross weight</b>	568.00 g
<b>Width</b>	185.00 mm
<b>Height</b>	80.00 mm
<b>Depth</b>	35.00 mm
<b>Main product weight</b>	492.00 g

### Highlights

- Configurable gain on both the forward and the return channels
- Attenuation and equalization adjustments on both the forward and the return channels
- Integrated high-efficiency low-power consumption switch-mode power supply

## Main features

---


- High output power
- Test input and output (-20 dB)
- High-screening Zamak chassis

## Application example

---


### HFC Docsis.

The Microkom multiband amplifier distributes the TV signal to the users while allowing the return signal to reach the optical node, which plays the role of media converter between the optical backbone and the coaxial networks.

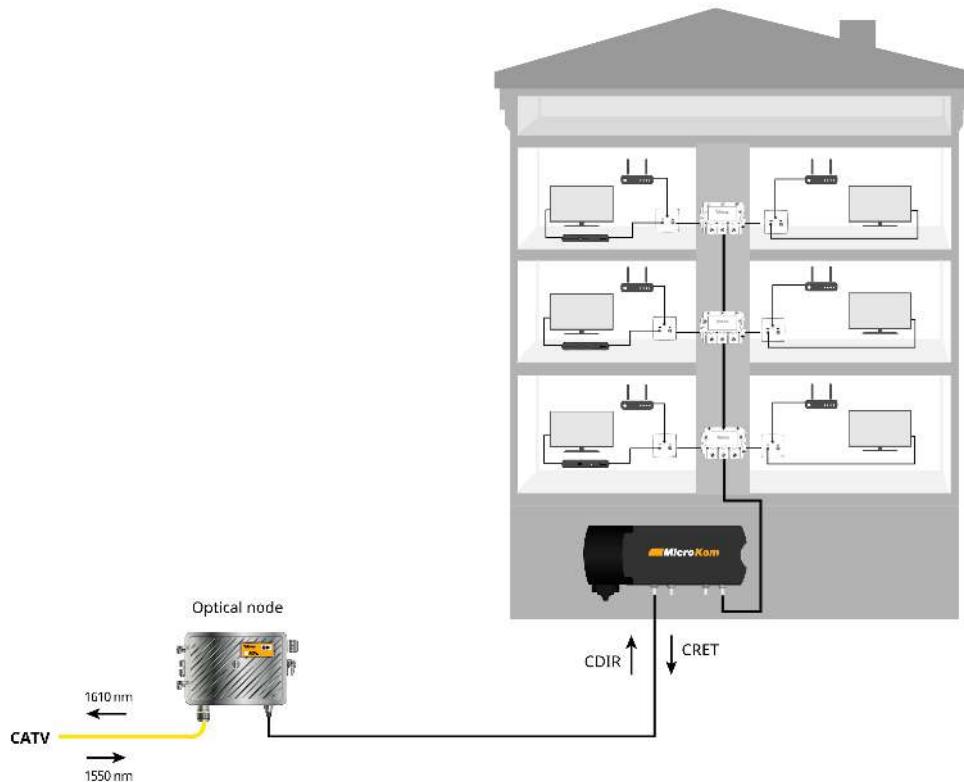

## Distribution amplifier.

The Microkom multiband amplifier plays the role of headend amplifier for the distribution of TV services

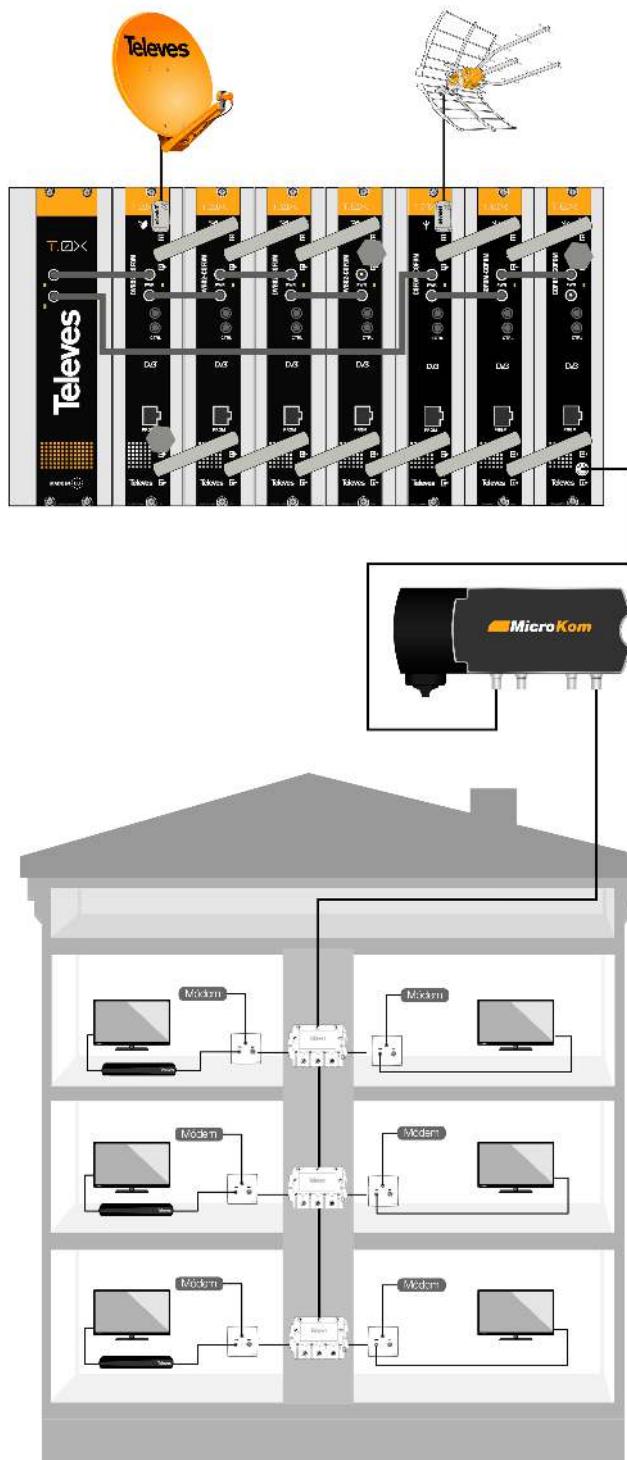

## Technical specifications : Ref. 534432

Bands		RET	TERR
Frequency range	MHz	5 ... 85	105 ... 1220
Gain	dB	-1 ... 28	30 ... 35
Nominal value desviation	dB	-1 ... 1	-1 ... 1
Flatness	dB	-1 ... 1	-1,5 ... 1,5
Input attenuator	dB	0 ... 18	0 ... 18
Input equalizer	dB	--	0 ... 18
Interstage attenuator	dB	--	0 ... 5
Interstage equalizer	dB	0 ... 6	0 ... 6
Noise figure	dB	< 6	7
Output level DIN45004B	dB $\mu$ V	117	124
Output level 64QAM 4TP	dBmV	115	--
CSO	dB	--	105
CTB	dB	--	105
Return losses	dB	> 12	> 12
Test point	dB	-20	-20
Max. power consumption	W	6.7	
Current consumption	mA	115	
Input voltage	Vac	110 ... 230	50 Hz / 60 Hz
Mains frequency			8
Electrostatic discharges protection	kV		Class II
Protection Class IEC			20
Protection index (IP)			"F" female
Connectors			-10 ... 45
Operating temperature	°C		

The input attenuator and equalizer are configurable in fixed 2dB steps.