
Televes

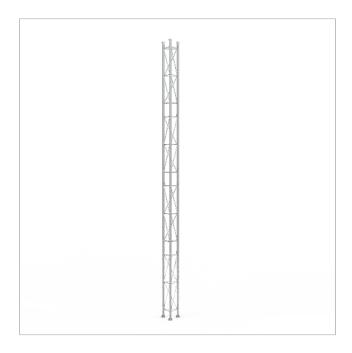

Middle section reinforced, Hot-Dip Galvanizing 180 tower

3m Middle Section reinforced for the erection of a 180 tower.

Ref.	303101
Logical ref.	TMIT180FV
EAN13	8424450152201

Other features

Colour	Grey
Finishing	Hot-Dip Galvanizing
Packaging info	
rackaging iiiio	
Unit	1 pcs.

Physical data

Photo with dimensions	3.00
Net weight	11,227.00 g
Gross weight	11,227.00 g
Width	180.00 mm
Height	3,010.00 mm
Depth	165.00 mm
Main product weight	11,227.00 g

Highlights


- Anchoring system with union nuts
- Easy and quick mounting
- Fully automated soldering

Televes

- 180 tower maximum height: 26.5m (as per calculation conditions)
- The hot-dip galvanizing surface treatment provides enhanced durability in adverse corrosion conditions
- Grey finish
- Main tubes of 20*2 mm and transverse rods of 6 mm

Mounting details

It consists in fixing the lower section to the base, set it in upright position and levelling it. The subsequent Middle Sections are then mounted, equipped with the appropriate guy wires; the mounting is carried out by climbing on the previously mounted sections and hoisting the new section with the help of the appropriate lifting tools.

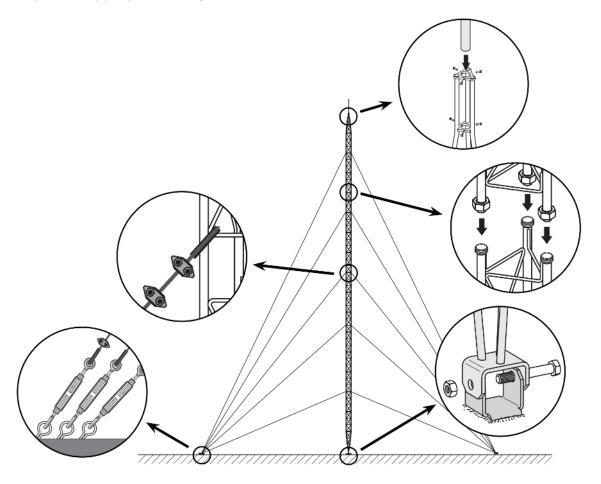

Televes®

Technical specifications: Ref. 303101

Surface facing the wind m² 0.283

.