

Lower section pivoting, Hot-galvanized 360 tower

3m lower section pivoting for the erection of a 360 series tower.

Guy wires are required for pivoting sections.

Ref.	308603
Logical ref.	TFUSS360FV
EAN13	8424450169186

Other features

Colour	Grey
Finishing	Hot-Dip Galvanizing

Packaging info

Unit	1 pcs.
-------------	--------

Physical data

Photo with dimensions	3.00
Net weight	23,000.00 g
Gross weight	23,000.00 g
Width	375.00 mm
Height	3,070.00 mm
Depth	325.00 mm
Main product weight	22,911.00 g


Highlights

- Anchoring system with union nuts
- Fully automated soldering
- 360 tower maximum height: 57m (as per calculation conditions)

- The hot-dip galvanizing surface treatment provides enhanced durability in adverse corrosion conditions
- Grey finish

Mounting details

It consists in fixing the lower section to the base, set it in upright position and levelling it. The subsequent Middle Sections are then mounted, equipped with the appropriate guy wires; the mounting is carried out by climbing on the previously mounted sections and hoisting the new section with the help of the appropriate lifting tools.

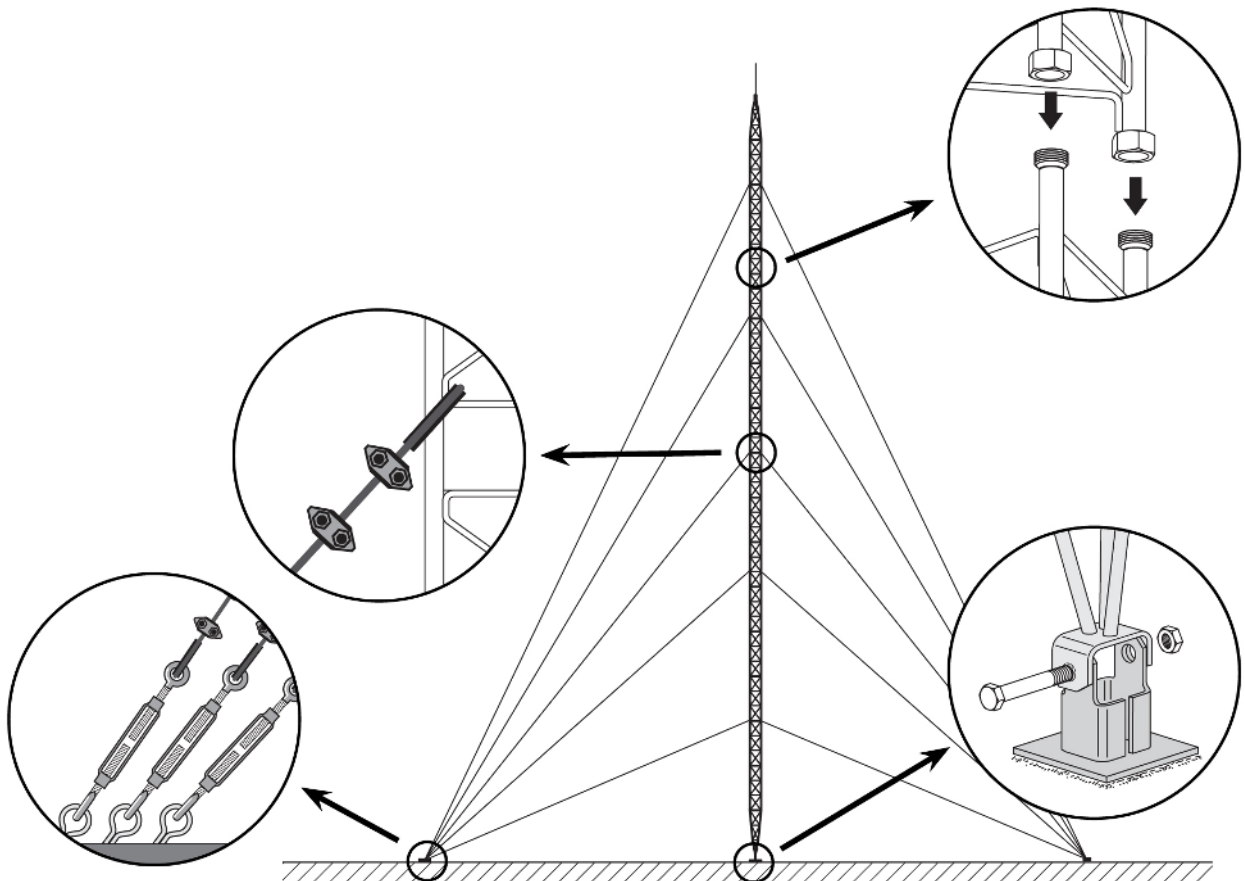

Technical specifications : Ref. 308603

Surface facing the wind	m ²	0.426
-------------------------	----------------	-------