



Top mast holder, Hot-Dip Galvanizing + Painting 550 ULTRA tower - Reinforced

Steel mast holders are reinforced to support configurations of significant height (200 m approx.) or subject to high loads and adverse weather conditions.

Ref.	313810
Logical ref.	TOBER550XL
EAN13	8424450181249

Other features

Colour	Red
Finishing	Hot-Dip Galvanizing + Red painted

Packaging info

Unit	1 pcs.
-------------	--------

Physical data

Net weight	20,000.00 g
Gross weight	20,000.00 g
Width	700.00 mm
Height	250.00 mm
Depth	638.00 mm
Main product weight	16,000.00 g


Highlights

- Anchoring system based on plates and union nuts
- Outstanding stiffness and mechanical strength
- Solid tube, no internal corrosion

- Maximum height of the 550 ULTRA tower: 200 m (as per calculation conditions)
- The hot-dip galvanizing surface treatment provides enhanced durability in adverse corrosion conditions
- Colour paint, oven-lacquering with polyester electrostatic powder
- Mast max. diameter: 62mm

Mounting details

It consists in fixing the lower section to the base, set it in upright position and levelling it. The subsequent Middle Sections are then mounted, equipped with the appropriate guy wires; the mounting is carried out by climbing on the previously mounted sections and hoisting the new section with the help of the appropriate lifting tools.

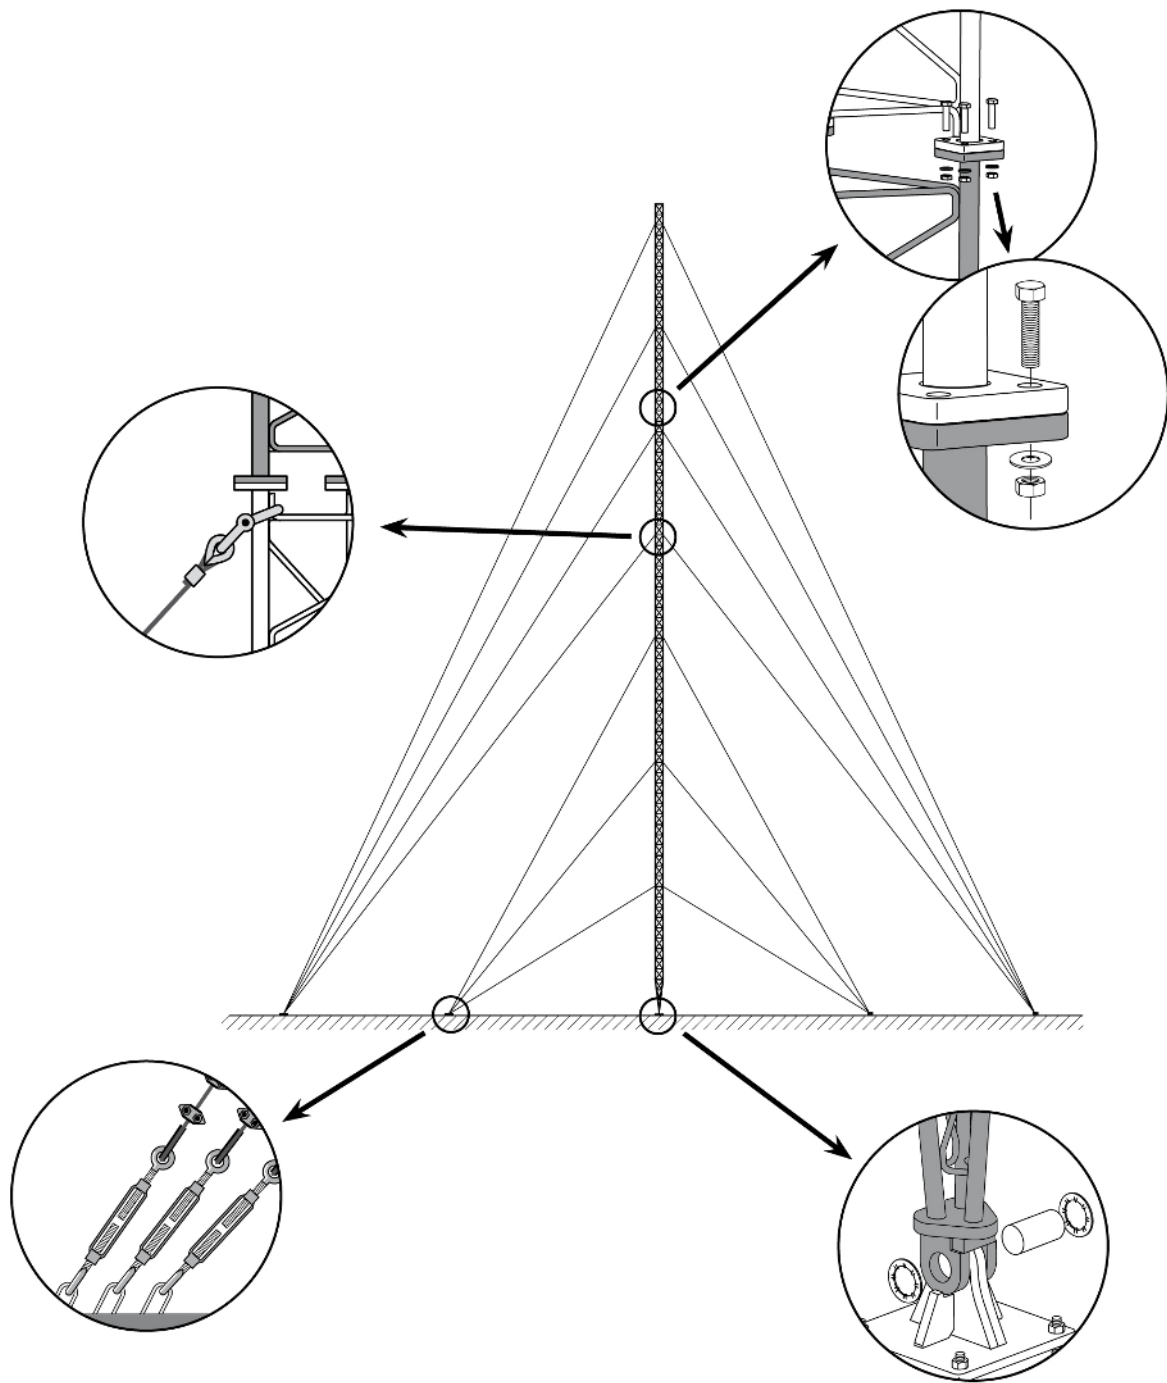

Technical specifications : Ref. 313810

Surface facing the wind	m ²	0.037
-------------------------	----------------	-------