

Lower section pivoting, Hot-Dip Galvanizing + Painting 550 tower

3m lower section pivoting for the erection of a 550-series tower.

The section is painted red (RAL 3020).

Guy wires are required for pivoting sections.

Ref.	313902
Logical ref.	TFUSS550FV
EAN13	8424450177723

Other features

Colour	Red
Finishing	Hot-Dip Galvanizing + Red painted

Packaging info

Unit	1 pcs.
-------------	--------

Physical data

Photo with dimensions	3.00
Net weight	97,000.00 g
Gross weight	97,000.00 g
Width	620.00 mm
Height	3,200.00 mm
Depth	536.00 mm
Main product weight	95,786.00 g

Highlights


- Anchoring system with union nuts
- 550 tower maximum height: 140m (as per calculation conditions)
- The hot galvanizing surface treatment provides enhanced durability in adverse corrosion

conditions

- Colour paint, oven-lacquering with polyester electrostatic powder

Mounting details

It consists in fixing the lower section to the base, set it in upright position and levelling it. The subsequent Middle Sections are then mounted, equipped with the appropriate guy wires; the mounting is carried out by climbing on the previously mounted sections and hoisting the new section with the help of the appropriate lifting tools.

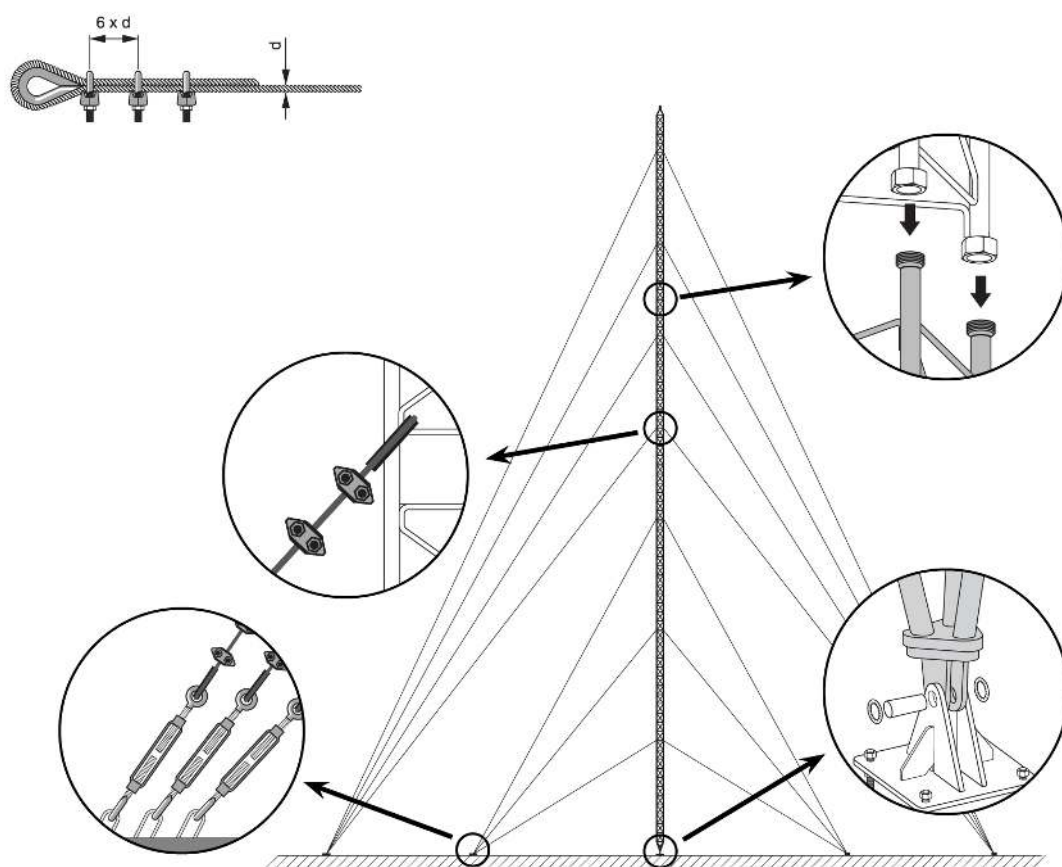

Technical specifications : Ref. 313902

Surface facing the wind	m ²	0.845
-------------------------	----------------	-------