

## Lower section pivoting, Hot-Dip Galvanizing + Painting 550 ULTRA tower - Reinforced

3m lower section pivoting for the erection of a 550 ULTRA-series tower.

The section is painted red (RAL 3020).

Guy wires are required for pivoting sections.

---

<b>Ref.</b>	313911
<b>Logical ref.</b>	TFUSS550XL
<b>EAN13</b>	8424450178959

---

### Other features

---

<b>Colour</b>	Red
<b>Finishing</b>	Hot-Dip Galvanizing + Red painted

---

### Packaging info

---

<b>Unit</b>	1 pcs.
-------------	--------

---

### Physical data

---

<b>Net weight</b>	189,000.00 g
<b>Gross weight</b>	189,000.00 g
<b>Width</b>	700.00 mm
<b>Height</b>	3,185.00 mm
<b>Depth</b>	638.00 mm
<b>Main product weight</b>	185,000.00 g

---

### Highlights

---


- Anchoring system based on plates and union nuts
- Outstanding stiffness and mechanical strength

- Solid tube, no internal corrosion
- Maximum height of the 550 ULTRA tower: 200m (as per calculation conditions)
- The hot-dip galvanizing surface treatment provides enhanced durability in adverse corrosion conditions
- Colour paint, oven-lacquering with polyester electrostatic powder

## Mounting details

---

It consists in fixing the lower section to the base, set it in upright position and levelling it. The subsequent Middle Sections are then mounted, equipped with the appropriate guy wires; the mounting is carried out by climbing on the previously mounted sections and hoisting the new section with the help of the appropriate lifting tools.

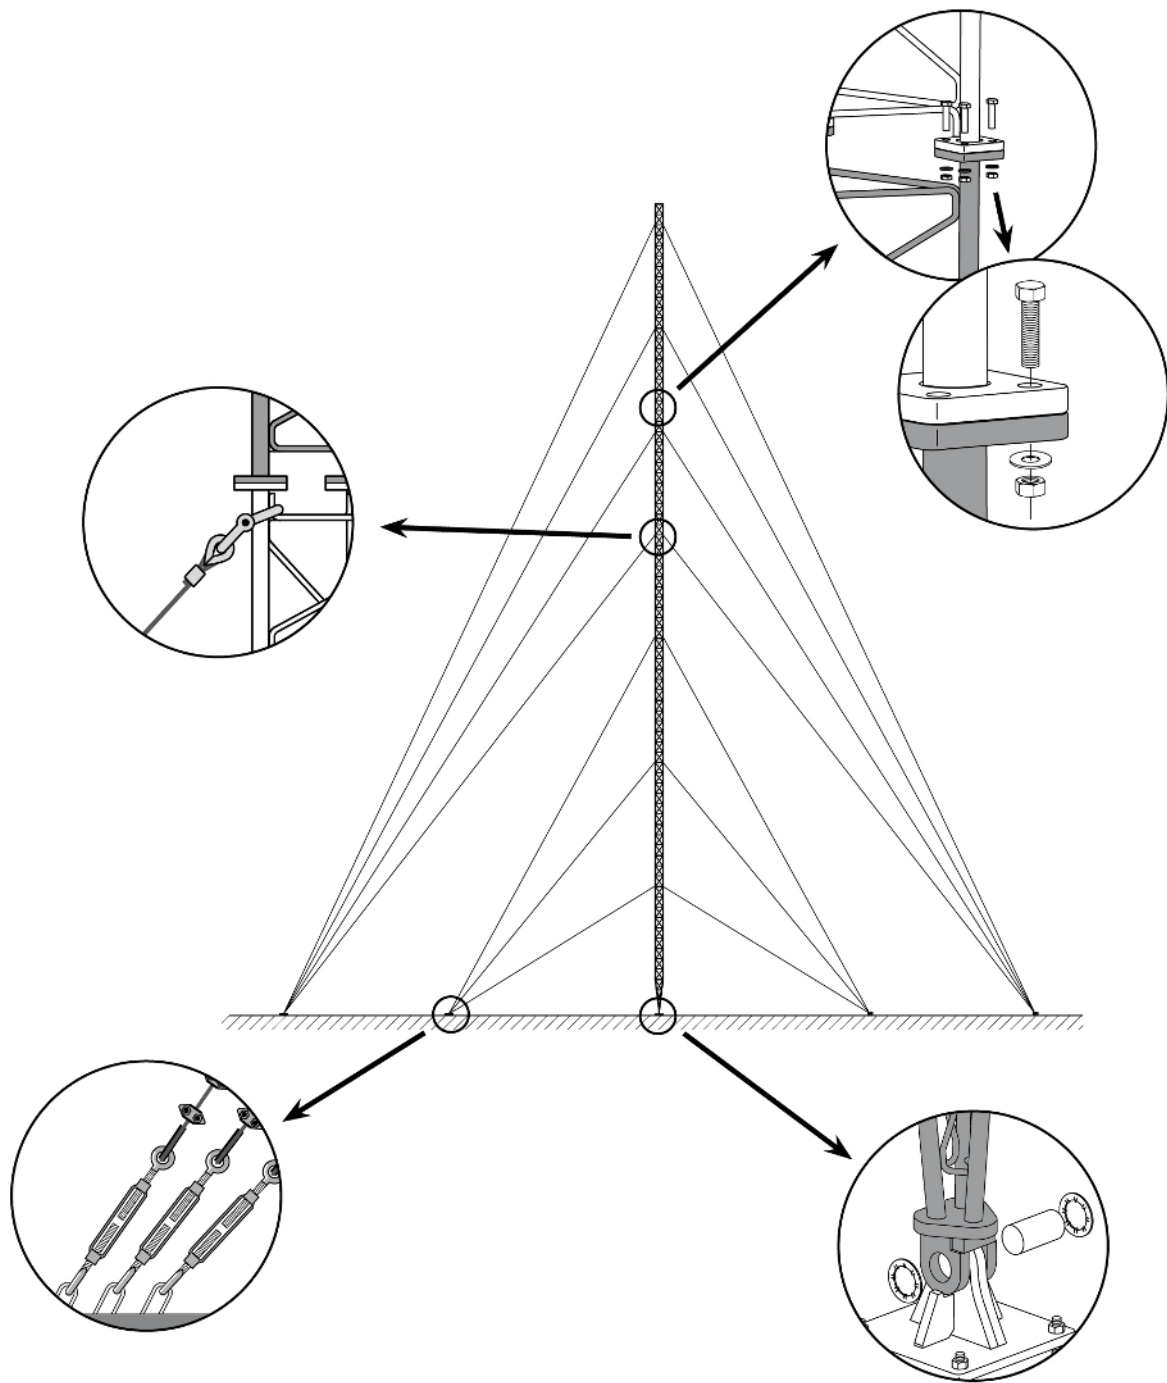

## Technical specifications : Ref. 313911

Surface facing the wind	m <sup>2</sup>	0.7
-------------------------	----------------	-----