



## UHF line amplifier, 13 dB 470...694 MHz (Ch.48), "F" connector

Low-gain (13 dB) UHF amplifier to be connected to the headend devices in order to adapt their input level.

---

<b>Ref.</b>	400620
<b>EAN13</b>	8424450206355

---

### Packaging info

---

<b>Box</b>	1 pcs.
<b>Carton</b>	10 pcs.
<b>Bucket</b>	500 pcs.

---

### Physical data

---

<b>Net weight</b>	78.00 g
<b>Gross weight</b>	85.00 g
<b>Width</b>	66.00 mm
<b>Height</b>	33.00 mm
<b>Depth</b>	22.00 mm
<b>Main product weight</b>	78.00 g

---

### Highlights


- Removes the LTE700/5G band
- Output powered

### Main features

---

- Plug-in format with "F" connectors
- Status LED

## Application example

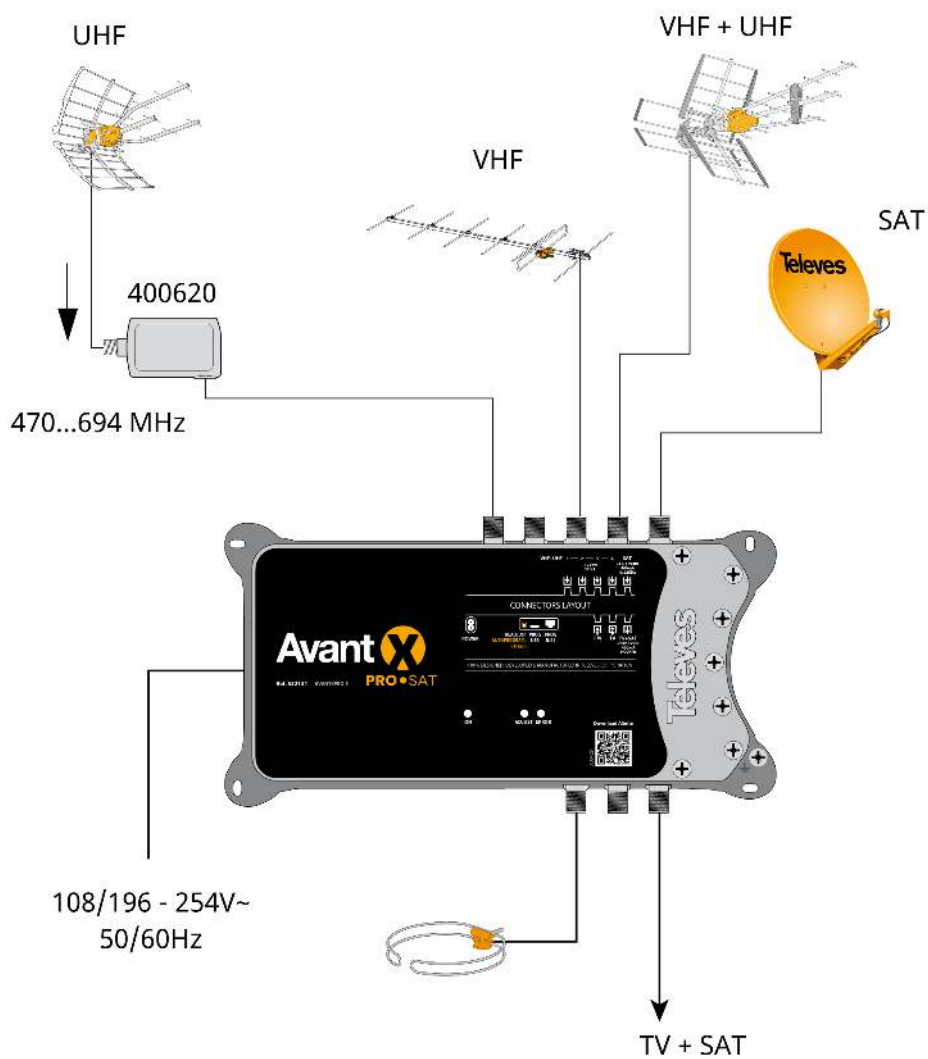

## Technical specifications : Ref. 400620

Number of inputs			1
Number of outputs			1
Bands			UHF
Frequency range	MHz		470 ... 694
Gain	dB		13
Noise figure	dB		4
Powering	Vdc		12 ... 24
Current consumption	mA		26