



HR (High Rejection) LTE/4G filter 47...790 MHz (Ch.60), "F" connector

LTE/4G filters with high rejection against interference from channel 60 up. The built-in female "F" connector can be used to plug the filter straight into the equipment to be protected from interference.

Ref.	403401
Logical ref.	TSK60FQLTE
EAN13	8424450154571

Packing

Box	1 pcs.
Carton	10 pcs.
Bucket	500 pcs.

Physical data

Net weight	77.00 g
Gross weight	77.00 g
Width	63.00 mm
Height	32.00 mm
Depth	22.00 mm
Main product weight	77.00 g


Highlights

- Plug-in format with integrated connector that adapts to any equipment
- Low insertion losses to avoid any impacts on the distributed signals

Main features

- Indoor installation
- Compact and light-weight size

Graphic documentation

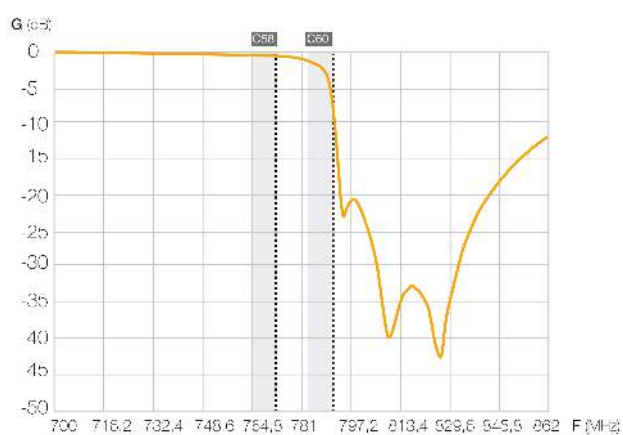

Frequency response

Technical specifications : Ref. 403401

Rejected band	MHz	793 ... 862
Rejected band attenuation	dB	> 25
Pass band	MHz	47 ... 790
Pass band attenuation	dB	1
Number of inputs		1
Number of outputs		1
Connectors		"F" type
Operating temperature	°C	-5 ... 45
Protection index		20