



## HR (High Rejection) LTE/4G filter 47...782 MHz (Ch.59) "F" Connector

LTE/4G filters with high rejection against interference from channel 59 up. The built-in female "F" connector can be used to plug the filter straight into the equipment to be protected from interference.

<b>Ref.</b>	403402
<b>Logical ref.</b>	TSK59QLTE
<b>EAN13</b>	8424450179017

### Packing

<b>Box</b>	10 pcs.
<b>Carton</b>	50 pcs.

### Physical data

<b>Net weight</b>	67.00 g
<b>Gross weight</b>	67.00 g
<b>Width</b>	63.00 mm
<b>Height</b>	32.00 mm
<b>Depth</b>	22.00 mm
<b>Main product weight</b>	67.00 g

### Highlights

- Plug-in format with integrated connector that adapts to any equipment
- Low insertion losses to avoid any impacts on the distributed signals


## Main features

---

- Indoor installation
- Compact and light-weight size

## Graphic documentation

---

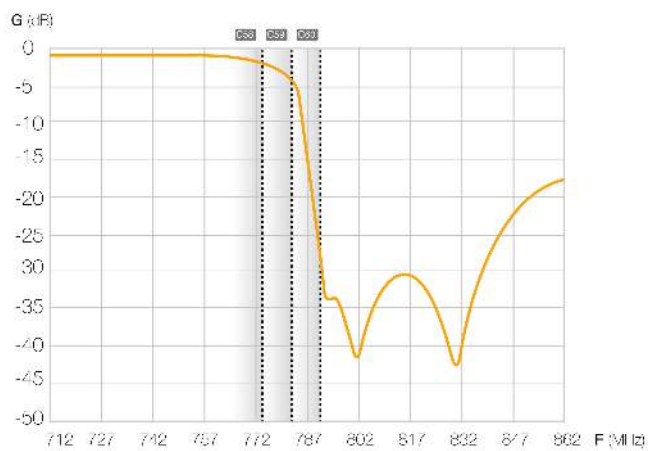

Frequency response

## Technical specifications : Ref. 403402

Rejected band	MHz	791 ... 862
Rejected band attenuation	dB	> 26
Pass band	MHz	47 ... 782
Pass band attenuation	dB	1
Number of inputs		1
Number of outputs		1
Connectors		"F" type
Operating temperature	°C	-5 ... 45
Protection index		20