



## HR (High Rejection) LTE/4G filter 47...790 MHz (Ch.60), "IEC" connector

LTE/4G filters with high rejection against interference from channel 60 up. The built-in female "IEC" connector can be used to plug the filter straight into the equipment to be protected from interference.

<b>Ref.</b>	404412
<b>Logical ref.</b>	TSK60IECLTE
<b>EAN13</b>	8424450167830

### Packing

<b>Bag</b>	1 pcs.
<b>Box</b>	10 pcs.

### Physical data

<b>Net weight</b>	80.00 g
<b>Gross weight</b>	92.00 g
<b>Width</b>	63.00 mm
<b>Height</b>	32.00 mm
<b>Depth</b>	22.00 mm
<b>Main product weight</b>	80.00 g

### Highlights

- Plug-in format with integrated connector that adapts to any equipment
- Low insertion losses to avoid any impacts on the distributed signals


## Main features

---

- Indoor installation
- Compact and light-weight size

## Graphic documentation

---

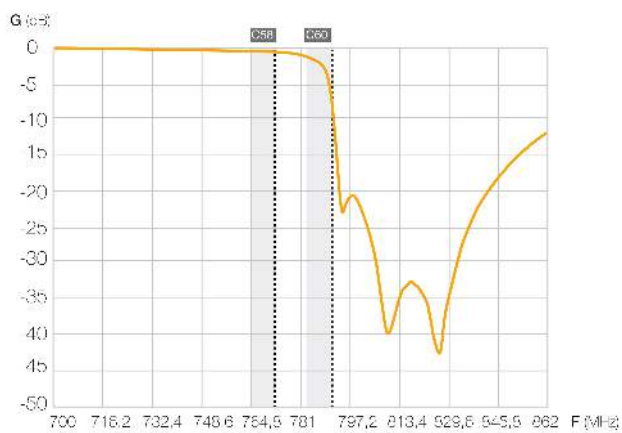

**Frequency response**

## Technical specifications : Ref. 404412

Rejected band	MHz	793 ... 862
Rejected band attenuation	dB	> 25
Pass band	MHz	47 ... 790
Pass band attenuation	dB	1
Number of inputs		1
Number of outputs		1
Connectors		"IEC" type
Operating temperature	°C	-5 ... 45
Protection index		20