



SK125plus 18 VATc coaxial cable Eca Euroclass, A+ Class shielded

RG-6 coaxial cable with both conductors made of copper (Cu/Cu) and outstanding braid coverage (60%). Triple shielded (TSH) cable, equipped with a second foil for extra shielded. An 18 VATc cable with PVC sheath.

Ref.	413502
Logical ref.	SK125/250PLUS
EAN13	8424450198995

Other features

Colour	White
Length	250.00 m

Packaging info

Reel	250 m
Pallet	6000 m

Physical data

Net weight	49.00 g
Gross weight	49.00 g
Width	7.00 mm
Height	1,000.00 mm
Depth	7.00 mm
Main product weight	49.00 g

Highlights

- Copper conductors

- Class A+ shielded
- Eca Euroclass

Main features

- White-colour external PVC sheath
- 75 Ohm characteristic impedance
- Available in reels of different lengths

Discover

Class A+ Trishield (TSH) coaxial cable

With three shielding layers (Trishield), this cables provide the highest immunity to interference thanks to its very high shielding. Recommended in cases of high electromagnetic noise levels.

They belong in EN 50117 standard Class A+, according to their structural properties:

- For 5 MHz - 30 MHz => TI < 2.5 mΩ/m
- For 30 MHz - 1000 MHz => SA > 95 dB
- For 1000 MHz - 2000 MHz => SA > 85 dB
- For 2000 MHz - 3000 MHz => SA > 75 dB

Where the transfer impedance (TI) defines how effective the shielding is at low frequencies, while the shielding attenuation (SA) defines it in the 30 MHz-to-3000 MHz range.

Class A+ Trishield (TSH) coaxial cable

With three shielding layers (Trishield), this cables provide the highest immunity to interference thanks to its very high shielding. Recommended in cases of high electromagnetic noise levels.

They belong in EN 50117 standard Class A+, according to their structural properties:


- For 5 MHz - 30 MHz => TI < 2.5 mΩ/m
- For 5 MHz - 1000 MHz => SA > 95 dB
- For 1000 MHz - 2000 MHz => SA > 85 dB
- For 2000 MHz - 3000 MHz => SA > 75 dB

Where the transfer impedance (TI) defines how effective the shielding is at low frequencies, while the shielding attenuation (SA) defines it in the 30 MHz-to-3000 MHz range.

Mounting details

DETAIL VIEW OF THE COAXIAL CABLE SECTION

- A**-Inner conductor
- B**-Dielectric
- C**-Foil
- D**-Braid
- E**-Second foil
- F**-Outer sheath

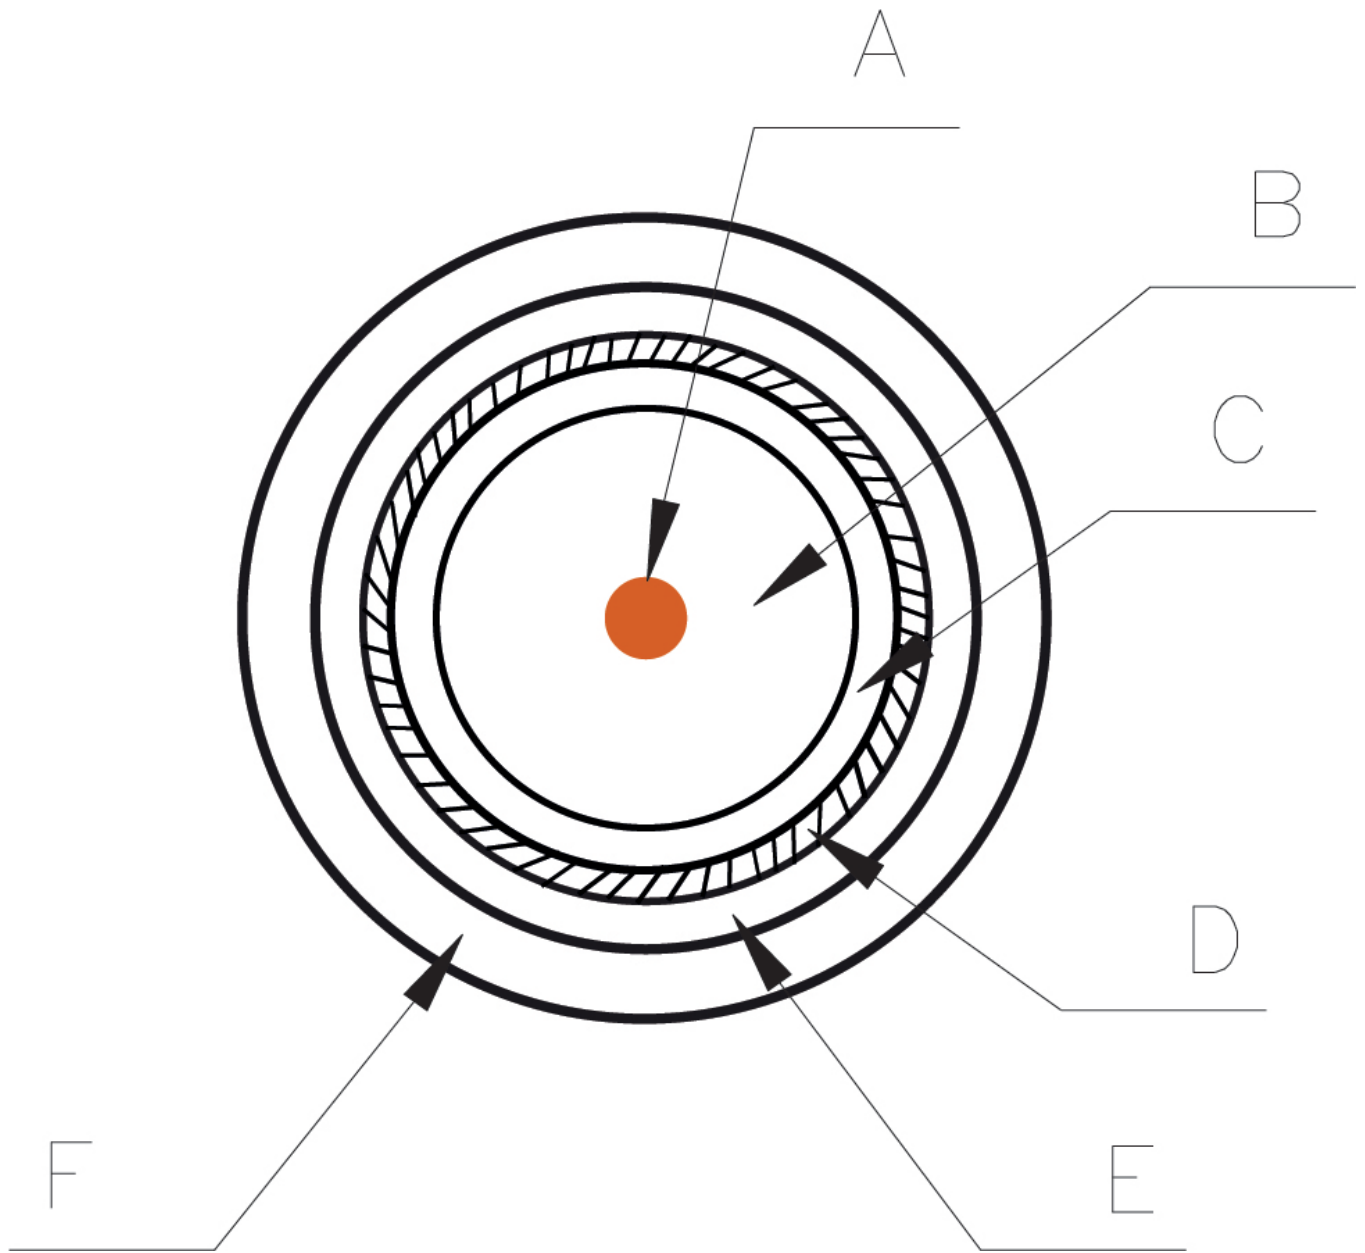

Technical specifications : Ref. 413502

Model		SK125plus																				
Cable type		RG-6																				
Standard		EN50117-9-2																				
Euroclass		Eca																				
Class		A+																				
Inner conductor Diameter	mm	1																				
Inner conductor Material		Copper (Cu)																				
Inner conductor Resistance	Ω/km	< 22																				
Dielectric Diameter	mm	4.6																				
Dielectric Material		Foam polyethylene (PEE)																				
Dielectric Color		Orange RAL 1007																				
Overlapped foil		Aluminium + Polyester																				
Braid Material		Tinned copper (CuSn)																				
Braid dimensions: No. of carriers (Nc)		16																				
Braid Dimensions: No. of strands per carrier (Ns)		6																				
Braid Dimensions: strand diameter (Ø)	mm	0.115																				
Braid Resistance	Ω/km	< 15																				
Braid Coverage	%	60																				
2nd foil		Yes																				
2nd foil glued to the dielectric		No																				
Petrol-jelly		No																				
Anti-migrating film		No																				
Outer sheath Diameter	mm	6.7																				
Outer sheath Material		PVC																				
Minimum bending radius	mm	33.5																				
Transfer impedance (5-30MHz)	mΩ/m	< 2.5																				
1GHz shielding	dB	> 95																				
Spark Test	Vac	3000																				
Capacitance	pF/m	53																				
Impedance	Ω	75																				
Velocity ratio	%	84																				
Operating temperature	°C	-30 ... 70																				
Frequencies		5 MHz	47 MHz	54 MHz	90 MHz	200 MHz	500 MHz	698 MHz	800 MHz	862 MHz	950 MHz	1000 MHz	1220 MHz	1350 MHz	1750 MHz	2050 MHz	2150 MHz	2200 MHz	2300 MHz	2400 MHz	3000 MHz	
Attenuation (typ.)	dB/m	0.02	0.05	0.05	0.06	0.09	0.14	0.16	0.18	0.19	0.2	0.21	0.22	0.25	0.28	0.31	0.32	0.32	0.32	0.32	0.34	0.36
Return losses (min.)	dB	23	23	23	23	23	20	20	20	20	20	20	20	18	18	18	16	16	16	16	16	16