



## Surge Arrester Accessory for BOSS antennas

To be inserted in the coaxial cable, just after the antenna, in order to redirect to ground any lightning strikes that could damage the antenna.

Recommended installation inside an outdoor housing attached to the mast (ref. 4163).

---

<b>Ref.</b>	494702
<b>Logical ref.</b>	USS3000N
<b>EAN13</b>	8424450252277

---

### Packaging info

---

<b>Box</b>	1 pcs.
------------	--------

---

### Physical data


---

<b>Net weight</b>	55.00 g
<b>Gross weight</b>	55.00 g

---

### Application example

---

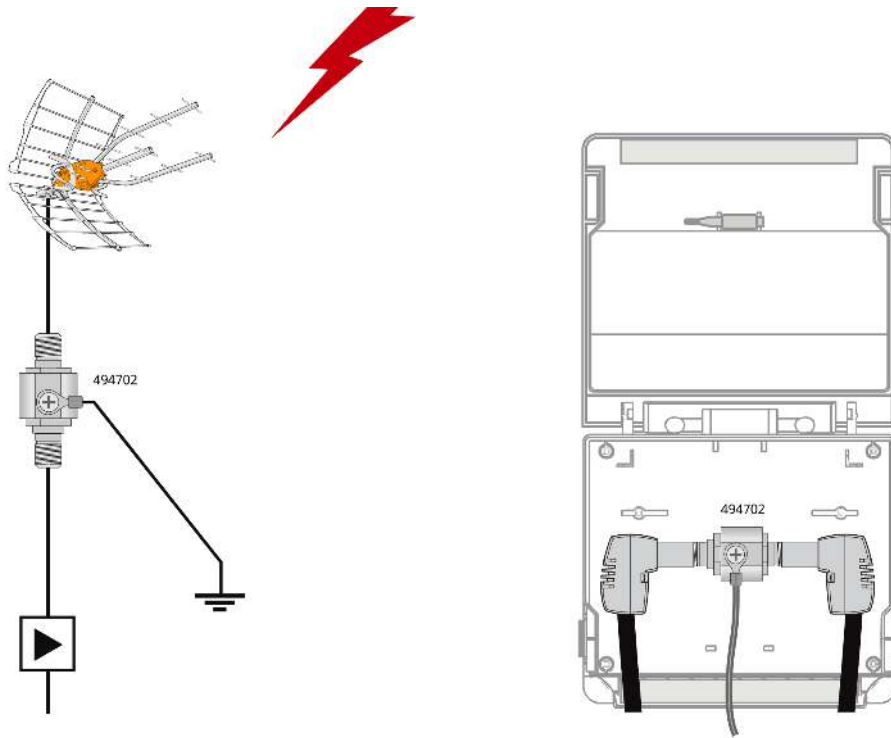

## Technical specifications

---

Frequency margin	Mhz	0 - 3000
Insertion losses	dB	0.1 - 0.3
Discharge voltage	V	90
Max. peak power (PEP)	W (Вт)	200
Max. discharge current	kA	10
Connectors		"F"
Impedance	Ohm	75
Operating temperature	°C	-40 ... 80