
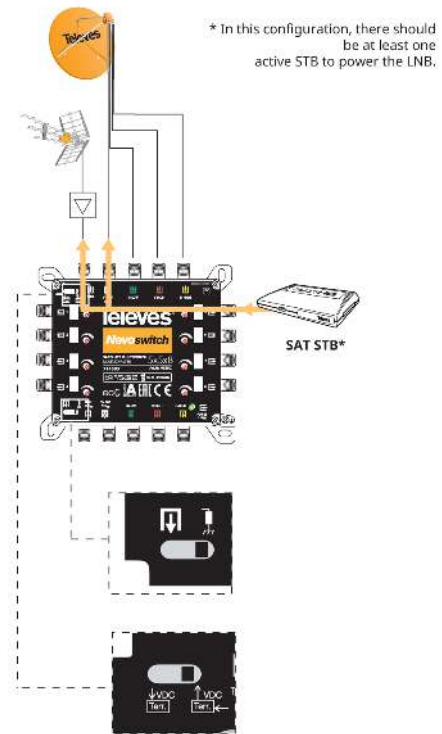


basis

- A switch for either powering terrestrial pre-amplifiers or allowing current circulation
- Can be powered directly from the satellite receiver, without the need for a power supply unit*
- Remote power feeding using VL
- Current circulation between all inputs and cascades
- Active terrestrial
- Available ECO mode
- Selector switch to shift between cascade and terminal modes
- 12 V power supply
- Low power consumption
- Input and output colour identification
- European design, quality, and manufacturing

Application example

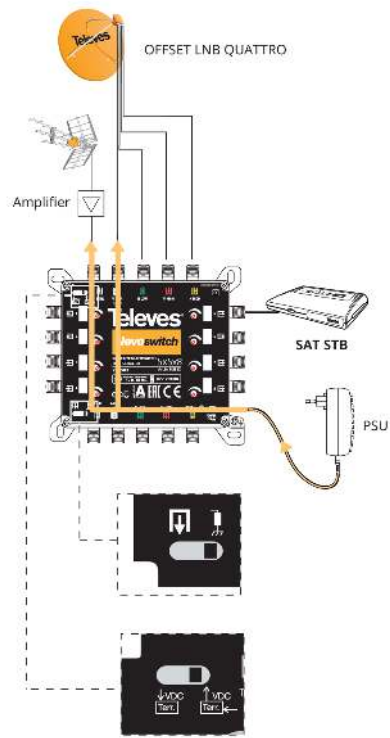

Technical specifications : Ref. 714505

Number of inputs		5
Number of cascable outputs		5
Number of user outputs		16
Frequency range TERR.	MHz	47 ... 862
Frequency range SAT.	MHz	950 ... 2400
Input level TERR.	dBmV	0.092
Input level SAT.	dBmV	0.105
Through losses TERR.	dB	4
Through losses SAT.	dB	3 ... 8
Tap losses 1...8 TERR.	dB	2
Tap losses 1...8 SAT.	dB	1
Tap losses 9...16 TERR.	dB	4
Tap losses 9...16 SAT.	dB	2
Tap regulation range	dB	0 ... 12
Isolation H/V	dB	> 30
Isolation users	dB	> 25
Powering	Vdc	12
Max. current (PSU)	mA	105
Max. current (STB)	mA	35
Operating temperature	°F	23 ... 113
Protection index		20