



EuroSwitch/NevoSwitch Quattro amplifier 10/11 dB, 5 inputs (1 satellite)

Amplifier equipped with 5 inputs (one terrestrial and the four Quattro polarities of one satellite) compatible with EuroSwitch and NevoSwitch ranges, that allows increasing the number of users in the installation while optimizing the signal received by each of them. Amplification around 10 dB for terrestrial, and 11 dB for satellite.

Ref.	714508
Logical ref.	MS510VGQ
EAN13	8424450181614

Packaging info

Box	1 pcs.
------------	--------

Physical data

Net weight	364.00 g
Gross weight	364.00 g
Width	137.00 mm
Height	121.00 mm
Depth	29.00 mm
Main product weight	356.00 g

Highlights


- High output level
- Switch for the selection of whether or not to power the terrestrial pre-amplifiers (VDC or OFF)

- Gain (20 dB) and slope (12 dB) individual adjustment
- Power feeding through the VL input/output

Main features

- Very compact
- Made of zamak
- Input and output colour identification
- 12 V power supply
- Low power consumption

Application example

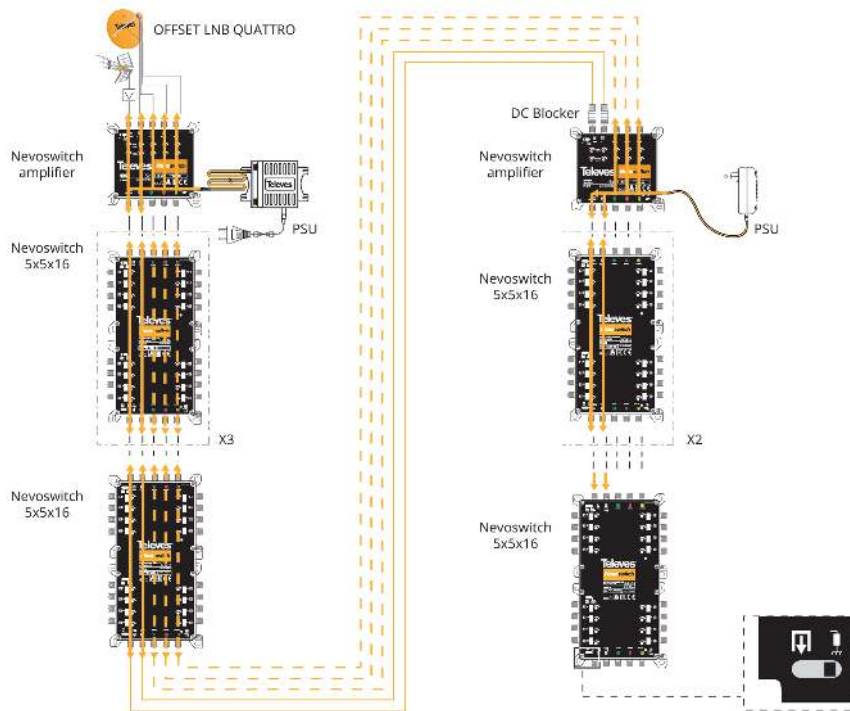

Technical specifications : Ref. 714508

Number of inputs			5
Number of outputs			5
Bands		TERR	SAT
Frequency range	MHz	47 ... 862	950 ... 2400
Output level	dB μ V	114	118
Gain	dB	10	11
Gain adjustment range	dB		0 ... 15
Slope regulation	dB		0 ... 12
Isolation	dB		> 25
Powering	Vdc		12 ... 18
Max current consumption (@12V)	mA		300
Max current consumption (@18V)	mA		200
Max. power consumption	W		3.6
Operating temperature	°C		-5 ... 45
Protection index (IP)			20