



Televes reserves the right to modify the product

## EuroSwitch/NevoSwitch Quattro amplifier 27/31 dB, 5 inputs (1 satellite)

Amplifier equipped with 5 inputs (one terrestrial and the four Quattro polarities of one satellite) compatible with EuroSwitch and NevoSwitch ranges, that allows increasing the number of users in the installation while optimizing the signal received by each of them. Amplification around 27 dB for terrestrial, and 31 dB for satellite.

<b>Ref.</b>	714509
<b>Logical ref.</b>	MS530VGQ
<b>EAN13</b>	8424450173398

### Packaging info

<b>Box</b>	1 pcs.
------------	--------

### Physical data

<b>Net weight</b>	366.00 g
<b>Gross weight</b>	366.00 g
<b>Width</b>	137.00 mm
<b>Height</b>	121.00 mm
<b>Depth</b>	29.00 mm
<b>Main product weight</b>	358.00 g

### Highlights

- High output level
- Switch for the selection of whether or not to power the terrestrial pre-amplifiers (VDC or OFF)

- Gain (20 dB) and slope (12 dB) individual adjustment
- Power feeding through the VL input/output


## Main features

---

- Very compact
- Made of zamak
- Input and output colour identification
- 12/18 V power supply
- Low power consumption

## Application example

---

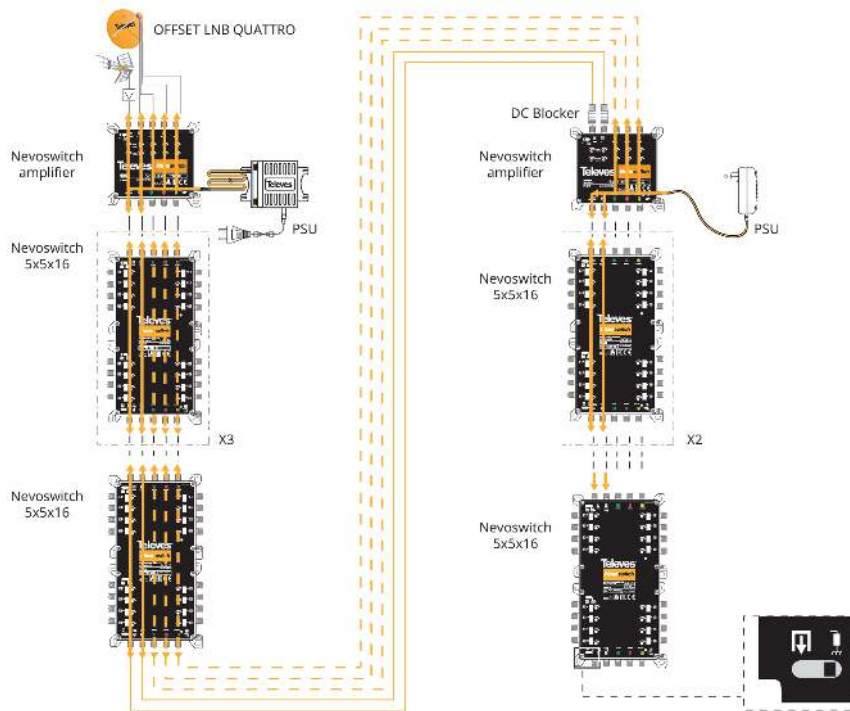

## Technical specifications : Ref. 714509

Number of inputs			5
Number of outputs			5
Bands		TERR	SAT
Frequency range	MHz	47 ... 862	950 ... 2400
Output level	dB $\mu$ V	114	118
Gain	dB	27	31
Gain adjustment range	dB		0 ... 15
Slope regulation	dB		0 ... 12
Isolation	dB		> 25
Powering	Vdc		12 ... 18
Max current consumption (@12V)	mA		400
Max current consumption (@18V)	mA		265
Max. power consumption	W		4.8
Operating temperature	°C		-5 ... 45
Protection index (IP)			20