



## NevoSwitch 9 inputs - 24 outputs

### When quality matters

Multiswitch equipped with 9 inputs (one terrestrial and 8 for two satellites, each with its four polarities) and 24 user outputs.

Can be used as a terminal (star topology) or as a cascade by using a simple switch.

---

<b>Ref.</b>	714604
<b>Logical ref.</b>	MS924C
<b>EAN13</b>	8424450173107

---

### Packaging info

---

<b>Box</b>	1 pcs.
------------	--------

---

### Physical data

---

<b>Net weight</b>	1,830.00 g
<b>Gross weight</b>	1,830.00 g
<b>Width</b>	206.00 mm
<b>Height</b>	386.00 mm
<b>Depth</b>	29.00 mm
<b>Main product weight</b>	1,818.00 g

---

### Highlights

---


- Very compact
- Made of zamak
- 10 dB Low Gain (LG) / High Gain (HG) switch for the attenuation of the satellite input signal for each 8-user group

- Remote power feeding through all satellite trunk lines
- Current circulation between all inputs and cascades
- Compatible with return-channel applications
- Available ECO mode
- Selector switch to shift between cascade and terminal modes
- 12 V power supply
- Low power consumption
- Input and output colour identification
- European design, quality, and manufacturing


## Application example

---

### SIMPLE CONFIGURATION

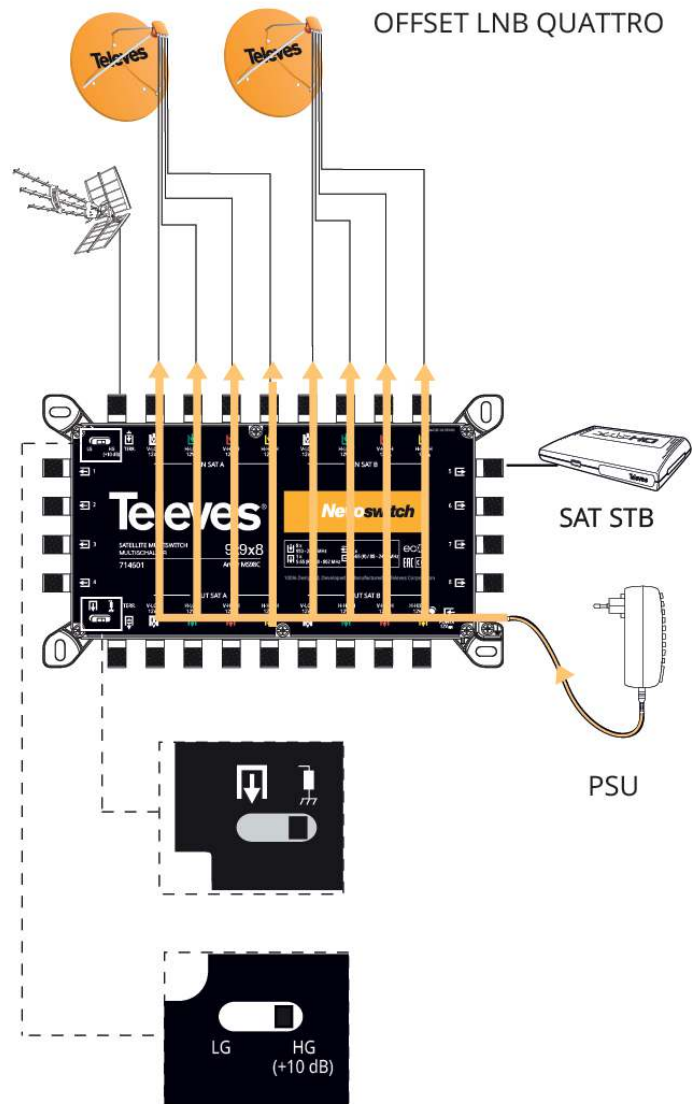

## CASCADE CONFIGURATION

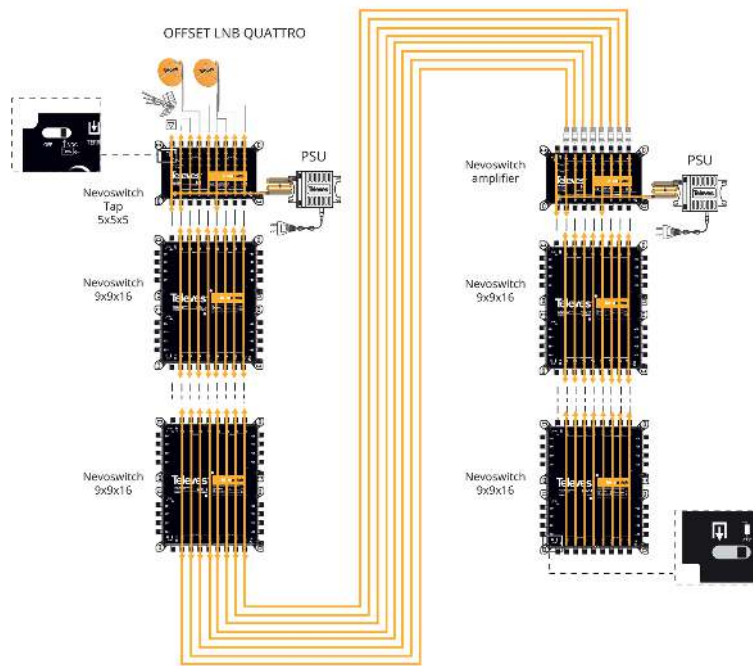

## Technical specifications : Ref. 714604

Number of inputs		9
Number of cascable outputs		9
Number of user outputs		24
Frequency range TERR.	MHz	88 ... 862
Frequency range SAT.	MHz	950 ... 2400
Input level TERR.	dBmV	0.09
Input level SAT.	dBmV	0.112
Through losses TERR.	dB	6
Through losses SAT.	dB	6 ... 15
Tap losses 1...8 TERR.	dB	4
Tap losses 1...8 SAT.	dB	0
Tap losses 9...16 TERR.	dB	6
Tap losses 9...16 SAT.	dB	4
Tap losses 17...24 TERR.	dB	8
Tap losses 17...24 SAT.	dB	8
Isolation H/V	dB	> 30
Isolation users	dB	> 25
Powering	Vdc	12
Max. current (PSU - LG)	mA	130
Max. current (PSU - HG)	mA	265
Max. current (STB)	mA	35
Operating temperature	°F	23 ... 113
Protection index		20