



NevoSwitch amplifier 9 inputs 27/31 dB

NevoSwitch amplifier equipped with 9 inputs (one terrestrial and the four polarities of two satellites) that allows increasing the number of users in the installation while optimizing the signal received by each of them. Around 27dB and 31dB amplification in terrestrial and satellite respectively. Compatible with the return path (passive).

Ref.	714609
Logical ref.	MS927VGQ
EAN13	8424450173503

Packing

Box	1 pcs.
-----	--------

Physical data

Net weight	546.00 g
Gross weight	546.00 g
Width	206.00 mm
Height	121.00 mm
Depth	29.00 mm
Main product weight	538.00 g

Highlights


- High output level
- Switch for the selection of whether or not to power the terrestrial pre-amplifiers (VDC or OFF)
- Gain (20 dB) and slope (12 dB) individual adjustment

- Power feeding through the VL input/output

Main features

- Very compact
- Made of zamak
- Input and output colour identification
- 12 V power supply
- Low power consumption

Application example

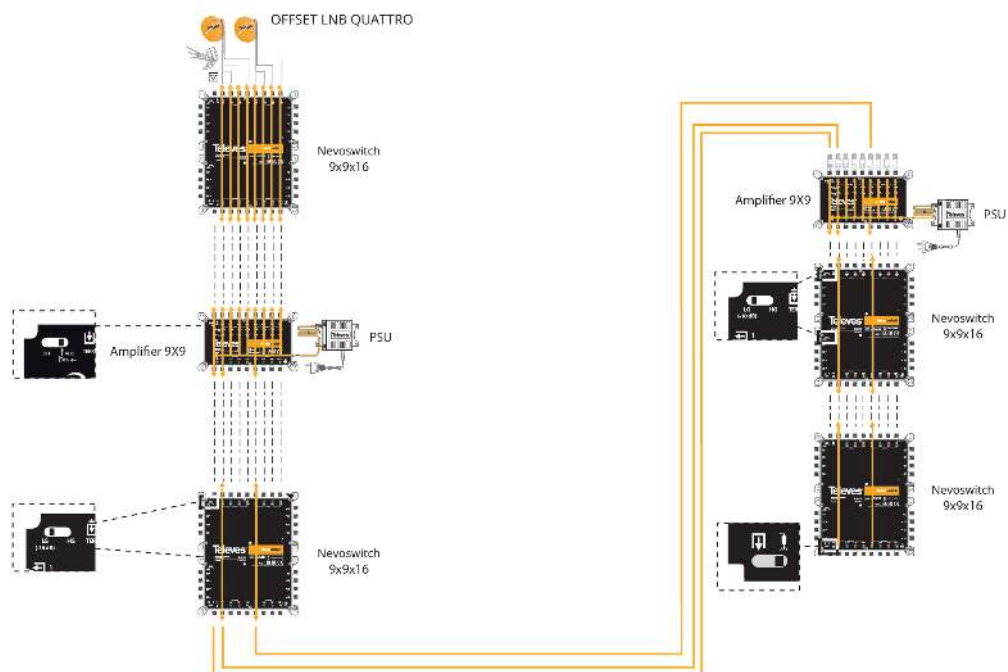

Technical specifications : Ref. 714609

Number of inputs			9
Number of outputs			9
Bands		TERR	SAT
Frequency range	MHz	88 ... 862	950 ... 2400
Output level	dBμV	112	119
Gain	dB	27	31
Gain adjustment range	dB		0 ... 20
Slope regulation	dB		0 ... 12
Isolation	dB		> 30
Powering	Vdc		12 ... 18
Max current consumption (@12V)	mA		600
Max current consumption (@18V)	mA		400
Max. power consumption	W		7.2
Operating temperature	°C		-5 ... 45
Protection index (IP)			20