



NevoSwitch 13 inputs - 8 outputs

When quality matters

Multiswitch equipped with 13 inputs (one terrestrial and 12 for three satellites, each with its four polarities) and 8 user outputs.

Can be used as a terminal (star topology) or as a cascade by using a simple switch.

Ref.	714701
Logical ref.	MS138C
EAN13	8424450173176

Packaging info

Box	1 pcs.
------------	--------

Physical data

Net weight	741.00 g
Gross volume	1.60 dm ³
Gross weight	741.00 g
Width	275.00 mm
Height	125.00 mm
Depth	30.00 mm
Main product weight	733.00 g


Highlights

- Very compact
- Made of zamak
- 10 dB Low Gain (LG) / High Gain (HG) switch for the attenuation of the satellite input signal for

each 8-user group

- Remote power feeding through all satellite trunk lines
- Current circulation between all inputs and cascades
- Compatible with return-channel applications
- Available ECO mode
- Selector switch to shift between cascade and terminal modes
- 12 V power supply
- Low power consumption
- Input and output colour identification
- European design, quality, and manufacturing

Application example

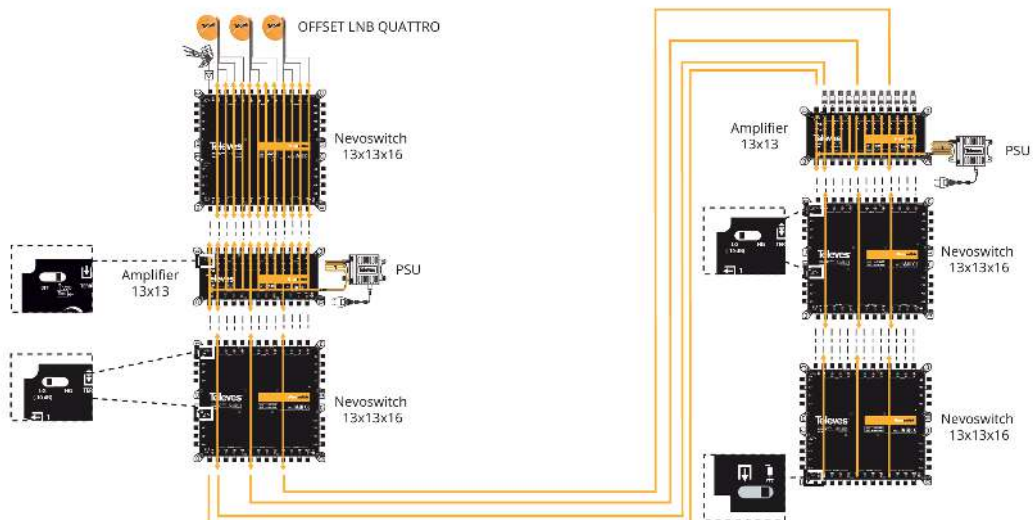

Technical specifications : Ref. 714701

Number of inputs		13
Number of cascable outputs		13
Number of user outputs		8
Frequency range TERR.	MHz	88 ... 862
Frequency range SAT.	MHz	950 ... 2400
Input level TERR.	dBmV	0.09
Input level SAT.	dBmV	0.112
Through losses TERR.	dB	2
Through losses SAT.	dB	2 ... 5
Tap losses 1...8 TERR.	dB	4
Tap losses 1...8 SAT.	dB	3
Isolation H/V	dB	> 30
Isolation users	dB	> 25
Powering	Vdc	12
Max. current (PSU - LG)	mA	40
Max. current (PSU - HG)	mA	85
Max. current (STB)	mA	40
Operating temperature	°F	23 ... 113
Protection index		20