



## NevoSwitch 13 inputs - 24 outputs

### When quality matters

Multiswitch equipped with 13 inputs (one terrestrial and 12 for three satellites, each with its four polarities) and 24 user outputs.

Can be used as a terminal (star topology) or as a cascade by using a simple switch.

---

<b>Ref.</b>	714704
<b>Logical ref.</b>	MS1324C
<b>EAN13</b>	8424450173213

---

### Packaging info

---

<b>Box</b>	1 pcs.
------------	--------

---

### Physical data

---

<b>Net weight</b>	2,379.00 g
<b>Gross volume</b>	4.65 dm <sup>3</sup>
<b>Gross weight</b>	2,379.00 g
<b>Width</b>	275.00 mm
<b>Height</b>	386.00 mm
<b>Depth</b>	30.00 mm
<b>Main product weight</b>	2,367.00 g

---

### Highlights


---

- Very compact
- Made of zamak
- 10 dB Low Gain (LG) / High Gain (HG) switch for the attenuation of the satellite input signal for

each 8-user group

- Remote power feeding through all satellite trunk lines
- Current circulation between all inputs and cascades
- Compatible with return-channel applications
- Available ECO mode
- Selector switch to shift between cascade and terminal modes
- 12 V power supply
- Low power consumption
- Input and output colour identification
- European design, quality, and manufacturing

## Application example

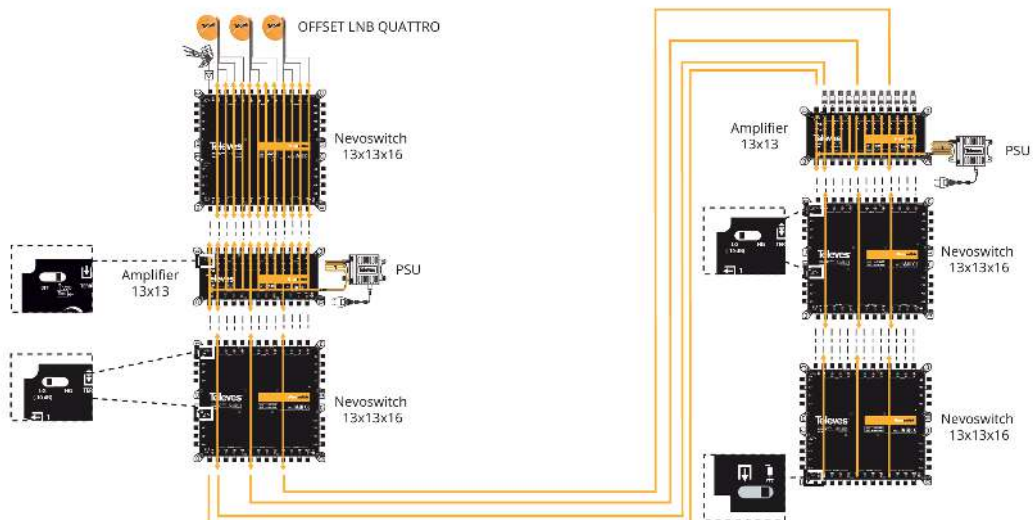

## Technical specifications : Ref. 714704

Number of inputs		13
Number of cascable outputs		13
Number of user outputs		24
Frequency range TERR.	MHz	88 ... 862
Frequency range SAT.	MHz	950 ... 2400
Input level TERR.	dBmV	0.09
Input level SAT.	dBmV	0.112
Through losses TERR.	dB	6
Through losses SAT.	dB	6 ... 15
Tap losses 1...8 TERR.	dB	4
Tap losses 1...8 SAT.	dB	3
Tap losses 9...16 TERR.	dB	6
Tap losses 9...16 SAT.	dB	6
Tap losses 17...24 TERR.	dB	8
Tap losses 17...24 SAT.	dB	10
Isolation H/V	dB	> 30
Isolation users	dB	> 25
Powering	Vdc	12
Max. current (PSU - LG)	mA	130
Max. current (PSU - HG)	mA	260
Max. current (STB)	mA	40
Operating temperature	°F	23 ... 113
Protection index		20