



## NevoSwitch 13 inputs - 32 outputs

### When quality matters

Multiswitch equipped with 13 inputs (one terrestrial and 12 for three satellites, each with its four polarities) and 32 user outputs.

Can be used as a terminal (star topology) or as a cascade by using a simple switch.

---

<b>Ref.</b>	714705
<b>Logical ref.</b>	MS1332C
<b>EAN13</b>	8424450173220

---

### Packaging info

---

<b>Box</b>	1 pcs.
------------	--------

---

### Physical data

---

<b>Net weight</b>	3,603.00 g
<b>Gross weight</b>	3,603.00 g
<b>Width</b>	275.00 mm
<b>Height</b>	515.00 mm
<b>Depth</b>	30.00 mm
<b>Main product weight</b>	3,591.00 g

---

### Highlights

---

- 10 dB Low Gain (LG) / High Gain (HG) switch for the attenuation of the satellite input signal for each 8-user group
- Remote power feeding using VL
- Current circulation between all inputs and cascades

- Compatible with return-channel applications
- European design, quality, and manufacturing


## Main features

---

- Very compact
- Made of zamak
- Input and output colour identification
- Available ECO mode
- Selector switch to shift between cascade and terminal modes
- 12 V power supply
- Low power consumption

## Application example

---

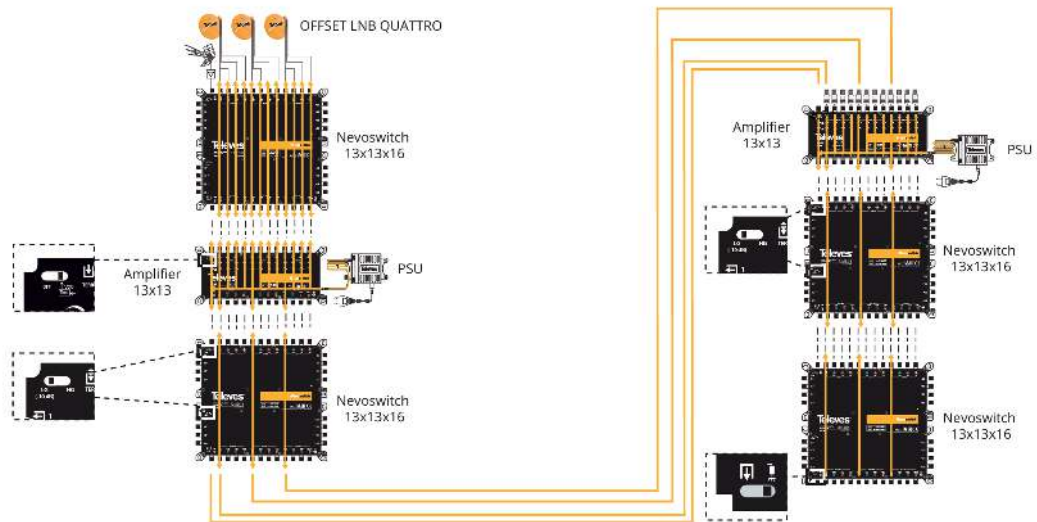

## Technical specifications : Ref. 714705

Number of inputs		13
Number of cascable outputs		13
Number of user outputs		32
Frequency range TERR.	MHz	88 ... 862
Frequency range SAT.	MHz	950 ... 2400
Input level TERR.	dBμV	90
Input level SAT.	dBμV	112
Through losses TERR.	dB	8
Through losses SAT.	dB	8 ... 18
Tap losses 1...8 TERR.	dB	4
Tap losses 1...8 SAT.	dB	3
Tap losses 9...16 TERR.	dB	6
Tap losses 9...16 SAT.	dB	6
Tap losses 17...24 TERR.	dB	8
Tap losses 17...24 SAT.	dB	10
Tap losses 25...32 TERR.	dB	10
Tap losses 25...32 SAT.	dB	14
Isolation H/V	dB	> 30
Isolation users	dB	> 25
Powering	Vdc	12
Max. current (PSU - LG)	mA	170
Max. current (PSU - HG)	mA	350
Max. current (STB)	mA	40
Operating temperature	°C	-5 ... 45
Protection index		20