



## NevoSwitch tap 5 inputs 20dB

NevoSwitch tap equipped with 5 inputs (one terrestrial and the four polarities of one satellite), with 20 dB bridging losses, that allows the balancing of the signals received by each user.

Ref.	714903
Logical ref.	AZS520G
EAN13	8424450173428

Televes reserves the right to modify the product

### Packaging info

Box	1 pcs.
-----	--------

### Physical data

Net weight	374.00 g
Gross weight	374.00 g
Width	138.00 mm
Height	121.00 mm
Depth	29.00 mm
Main product weight	366.00 g

### Highlights

- Current circulation in all inputs and all outputs with DC bypass
- Current circulation in the vertical low (VL) bypass and terrestrial output
- Low through losses


## Main features

---

- Very compact
- Made of zamak
- Input and output colour identification
- Passive element that does not require power feeding

## Application example

---

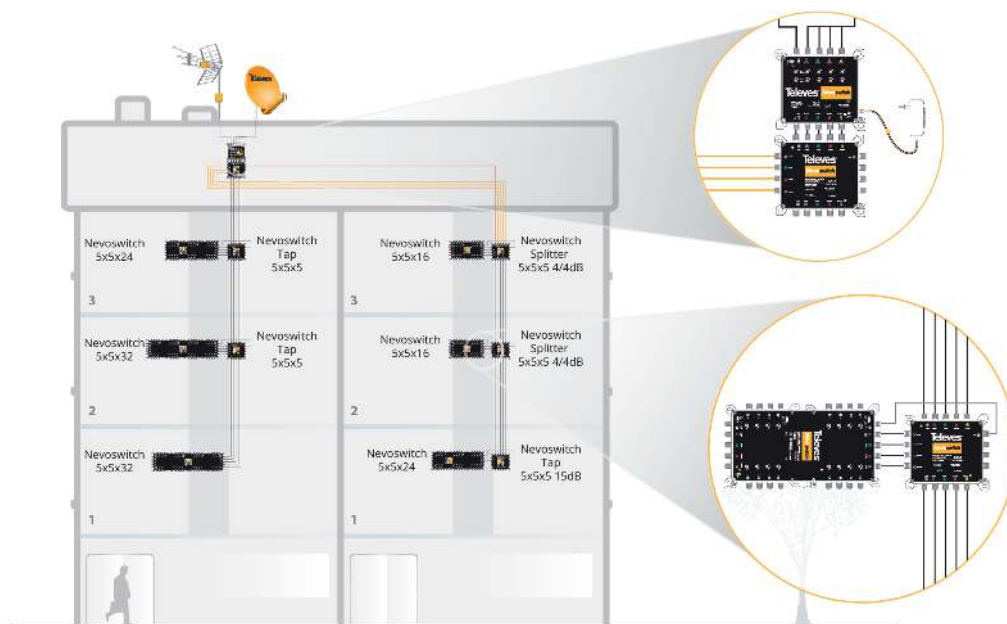

## Technical specifications : Ref. 714903

Number of inputs		5
Number of cascable outputs		5
Number of user outputs		5
Frequency range TERR.	MHz	47 ... 862
Frequency range SAT.	MHz	950 ... 2400
Through losses TERR.	dB	1.5
Through losses SAT.	dB	1.5
Tap losses TERR.	dB	20
Tap losses SAT.	dB	21
Isolation H/V	dB	> 25
Isolation users	dB	> 25
DC pass		In□Out / Tap□In/Out
Connectors		"F" type
Operating temperature	°C	-5 ... 45
Protection index (IP)		20