



## NevoSwitch tap 5 inputs 8dB

NevoSwitch tap equipped with 5 inputs (one terrestrial and the four polarities of one satellite), with 8 dB bridging losses, that allows the balancing of the signals received by each user.

Ref.	714906
Logical ref.	AZS58G
EAN13	8424450184998

### Packaging info

Box	1 pcs.
-----	--------

### Physical data

Net weight	372.00 g
Gross weight	372.00 g
Width	138.00 mm
Height	121.00 mm
Depth	29.00 mm
Main product weight	364.00 g

### Highlights

- Current circulation in all inputs and all outputs with DC bypass
- Current circulation in the vertical low (VL) bypass and terrestrial output
- Low through losses


## Main features


---

- Very compact
- Made of zamak
- Input and output colour identification
- Passive element that does not require power feeding

## Application example

---

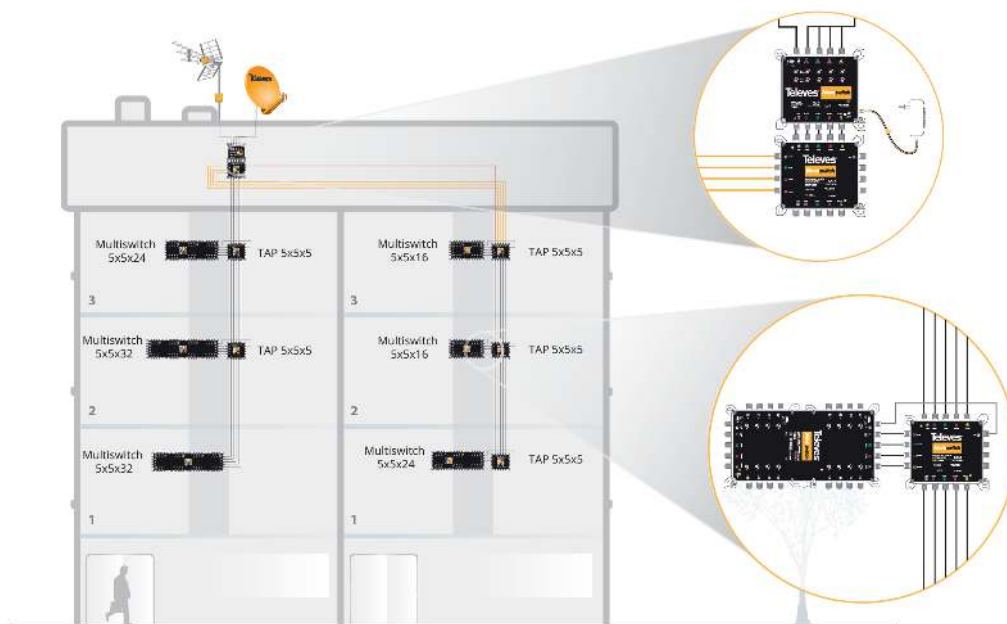

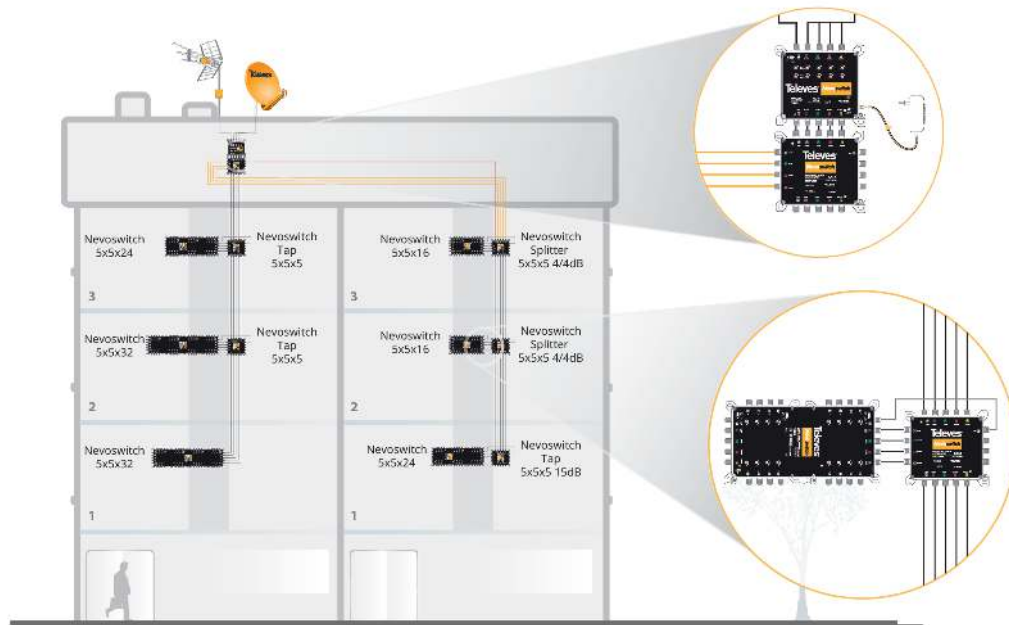

## Technical specifications : Ref. 714906

Number of inputs		5
Number of cascable outputs		5
Number of user outputs		5
Frequency range TERR.	MHz	47 ... 862
Frequency range SAT.	MHz	950 ... 2400
Through losses TERR.	dB	3.5
Through losses SAT.	dB	3.5
Tap losses TERR.	dB	8
Tap losses SAT.	dB	8
Isolation H/V	dB	> 25
Isolation users	dB	> 25
DC pass		In□Out / Tap□In/Out
Connectors		"F" type
Operating temperature	°C	-5 ... 45
Protection index (IP)		20