



Transcoder/Streamer Live Plus

Televés multiscreen transcoder includes two functions on a single device: transcoding and streaming, enabling to transcode live content and stream it through HLS, UDP or RTP.

It allows streaming television channels to any device (Smartphones, Tablets, STBs, PCs, Smart TVs...) through any kind of network.

Ref.	832204
	ATRANSPLUS
EAN13	8424450208175

Andra funktioner

Transcodification capacity	Live Plus
-----------------------------------	-----------

Fysisk data

Nettovikt	6.900,00 g
Bruttovikt	6.900,00 g

Förpackning

Låda	1 st.
-------------	-------


Utmärkande egenskaper


- It supports different architectures and configuration modes, like an all-in-one configuration where a single equipment will simultaneously behave as a transcoder and a streamer.
- Equipment reconfiguration. Depending on the requirements of the project, the device can be

configured as a transcoder, a streamer or both simultaneously, sharing the resources.

- Native multi-device player. The web player is optimized to use the HW decoding resources of each specific device, improving performance and optimizing power consumption.
- Players consistent with Casting devices. The web players, of the suitable devices, allow sending contents to casting devices like Chromecast or Apple TV.
- Responsive web tool. All management and configuration of the equipment can be carried out from a web interface that adapts to any device.
- Output resolutions up to 1080p.
- Adaptive streaming. The video quality will dynamically adapt to the network capacity, delivering the highest possible quality at any time.
- It supports the most popular codecs that are being used currently for video streaming, including HEVC, allowing for an even higher optimization of the network resources. Primarily designed for use on LTE networks.
- Fully scalable. A tool with multiple node management capacity. New equipment hot-plug capability.

Applikationsexempel

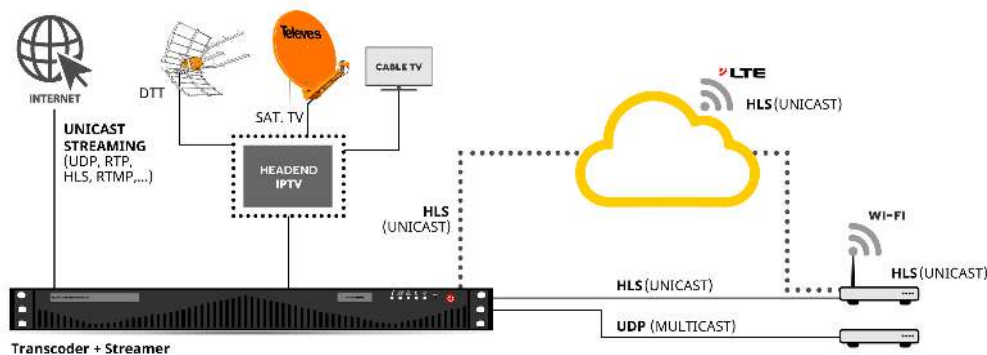

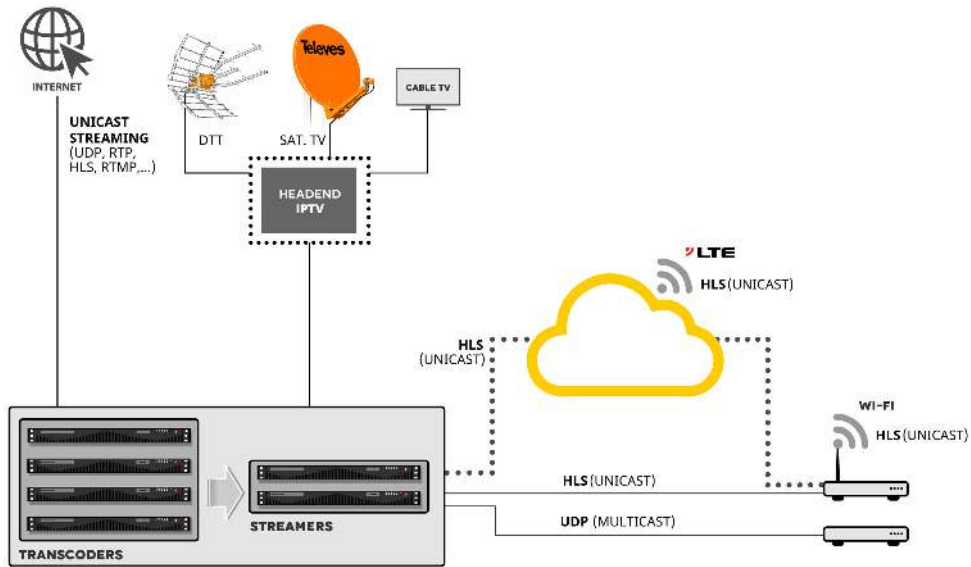

Tekniska specifikationer

Performance	Transcoding	Input			Output (H.264)	
		Channels	Codec	Resolution	Profiles	Resolutions
		10	H.264	1080i@30	3	480p, 360p, 144p
		10		720p@50	3	480p, 360p, 144p
		15	MPEG2	PAL / NTSC	3	480p, 360p, 144p
		10	H.264	1080i@25	3	480p, 360p, 144p
	8	1080i@25		4	720p, 480p, 360p, 144p	
	Input			Output (MPEG2)		
	Channels	Codec	Resolution	Profiles	Resolutions	
	9	H.264	1080i@25	1	1080i	
11	720p@50		1	720p		
9	1080i@30		1	1080i		
Maximum: 3x 1Gbps interfaces						
Users per interface		Total users	Output quality	Bit rate per user		
225		675	480p	4 Mbps		
250		750	404p	4 Mbps		
450		1350	404p	2 Mbps		
375		1125	360p	2 Mbps		
900		2700	144p	1 Mbps		

Hardware Description	Frame	Dimensions	437 x 43 x 287mm
		Weight	4,99kg
		Cooling	4 high-efficiency fans
		Network connections	4 GbE ports
	Power Supply	200W AC 100-240V 50/60Hz 16 -0,1A	
		Energy performance certification	Gold
	Average power consumption	120V / 0,8 - 1A	
		230V / 0,4 - 0,6 A	