



## InnerLED Industrial Luminaire 72LED 130W

Linear luminaire for rectangular rooms in industrial and professional environments

High-performance, high-quality LED luminaire for indoor use. Made from extruded and anodised aluminium that increases its toughness, it is highly resistant to impact and corrosion, guaranteeing high durability. Thanks to its rectangular shape, InnerLED is ideal for illuminating industrial indoor environments, even under hostile conditions. In addition, this luminaire fits perfectly into the lighting of indoor sports surfaces, such as sports centres, pavilions, tracks or indoor swimming pools, as it complies with the demanding regulations and requirements of these facilities, achieving uniform lighting, improving the visibility of athletes and spectators without shadows or reflections.

The InnerLED structure favours thermal control of the driver and the LED module, making it suitable for intensive use without raising its temperature. Good thermal management combined with the quality of its components maximises the useful life of the luminaire.

Thanks to its high efficiency and durability, InnerLED is an excellent solution for reducing energy consumption and maintenance costs, while offering impeccable lighting, creating more pleasant spaces with greater visual comfort.

---

Ref.	62550000
EAN13	8424450306741

---

## Other features

---

Number of LEDs	72
Lighting control	No dimmable
Power	130.00 W

---

## Packaging info

---

Box	1 pcs.
-----	--------

---

## Physical data

---

Net weight	7,000.00 g
Gross weight	8,800.00 g
Width	309.00 mm
Height	417.00 mm
Depth	205.00 mm
Main product weight	7,000.00 g

---

## Highlights

---

- **Durability and resistance:** compact extruded and anodised aluminium structure, corrosion resistant even in the most aggressive environments
- **Quick return on investment:** the high light efficiency provides substantial energy savings of up to 80%
- **Minimizes maintenance costs:** due to its long working life and easy component replacement
- **Perfect thermal management:** heat conduction and convection are favoured by the dissipation curves of the luminaire structure
- **Simple replacement of existing light points:** easy connection and installation without opening the luminaire.
- **LED multi array modules:** selection of corresponding BINs with 3-step McAdam ellipse (SDCM <3) and maximum efficiency
- **Driver certificated ENEC**
- **100% made in Televes:** technology designed and manufactured in our cutting-edge facilities, guaranteeing total control, with demanding quality monitoring, over each of the production phases

## Discover

Our ranges of luminaires encompass a wide range of powers and number of LEDs, in addition to being customizable in the types of lighting control, colour temperatures, optics and their light distribution, and finishes. **A product can be configured according to these parameters, and ordered by its numerical or logical reference**, as follows:

### Selecting the luminaire by the numerical reference:

This is a numerical code made up of 14 digits:

- The first 6 digits represent a code that depends on the Series of the luminaire, the number of LEDs and the power
- The next 8 digits allow you to choose the configurable parameters of the luminaire: lighting control, colour temperature, type of optics and finish

Series		Dimming		Colour Temperature		Optics		Finish	
<b>631703</b>	<i>Urban Alameda E 24LED 53W</i>	<b>00</b>	<i>No Dimming</i>	<b>18</b>	<i>PC Amber</i>	<b>02</b>	<i>SP</i>	<b>02</b>	<i>Black</i>
<b>631713</b>	<i>Urban Alameda E 24LED 39W</i>	<b>01</b>	<i>Dimming</i>	<b>22</b>	<i>2200K</i>	<b>11</b>	<i>D90</i>	<b>xx</b>	<i>Custom</i>
				<b>27</b>	<i>2700K</i>	<b>17</b>	<i>T2-C90</i>		
				<b>30</b>	<i>3000K</i>	<b>18</b>	<i>T3-B90</i>		
				<b>40</b>	<i>4000K</i>				

### Selecting the luminaire by logical reference:

This is an alphanumeric code composed of an unlimited number of characters, describing the luminaire's characteristics using logical abbreviations, to facilitate its interpretation. It is divided into 2 groups of characters, separated by a hyphen:

- The first group specifies: the luminaire series, the number of LEDs, the colour temperature, and the lighting control
- The second group specifies: the type of optics, the finish and the power

An example of a logical reference: UA2418D-D90BL53

- **UA** – *Urban Alameda*


- **24** – 24 LEDs
- **18** – Colour Temperature: PC Amber
- **D** – Dimming included
  
- **D90** – D90 Optics
- **BL** – Black colour
- **53** – 53W Power

Range & LED number		Colour Temperature		Dimming		Optics	Finish		Power	
<b>UA24</b>	<i>Urban Alameda E 24LED</i>	<b>18</b>	<i>PC Amber</i>	(∅)	<i>No Dimming</i>	<b>SP</b>	<b>BL</b>	<i>Black</i>	<b>53</b>	<i>53W</i>
		<b>22</b>	<i>2200K</i>	<b>D</b>	<i>Dimming</i>	<b>D90</b>	<b>xx</b>	<i>Custom</i>	<b>39</b>	<i>39W</i>
		<b>27</b>	<i>2700K</i>			<b>T2-C90</b>				
		<b>30</b>	<i>3000K</i>			<b>T3-B90</b>				
		<b>40</b>	<i>4000K</i>							

## Graphic documentation


---

## S90

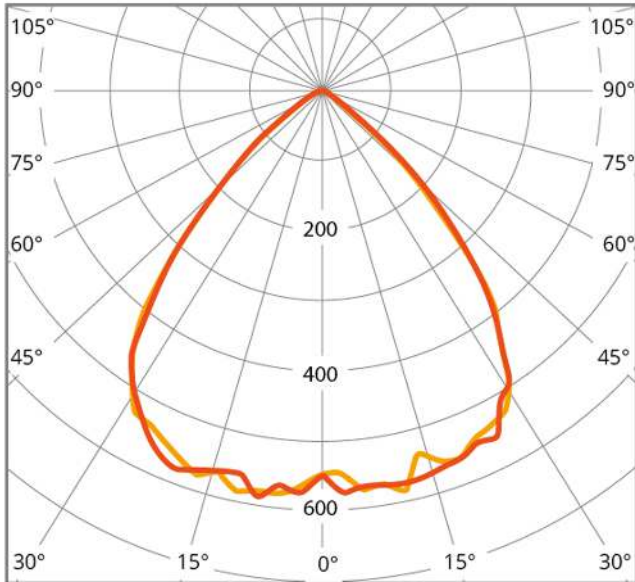


cd/klm    ■ C0 - C180    ■ C90 - C270     $\eta = 100\%$   
**Light distribution curve**

## S30

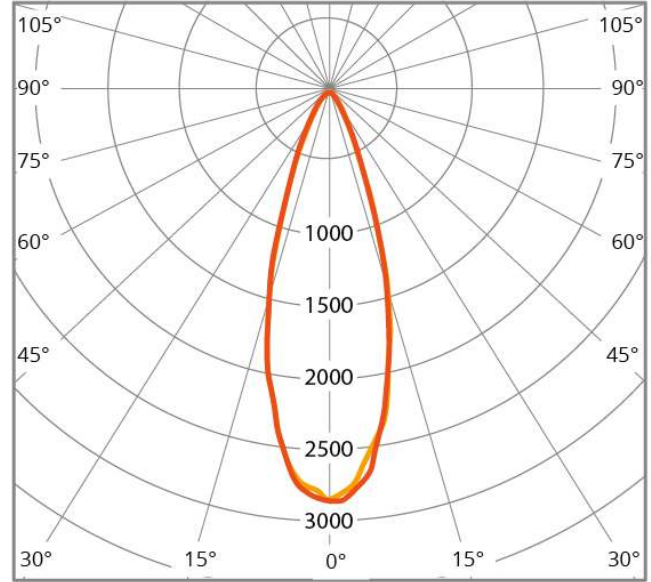

cd/klm    ■ C0 - C180    ■ C90 - C270     $\eta = 100\%$   
**Light distribution curve**

## S60

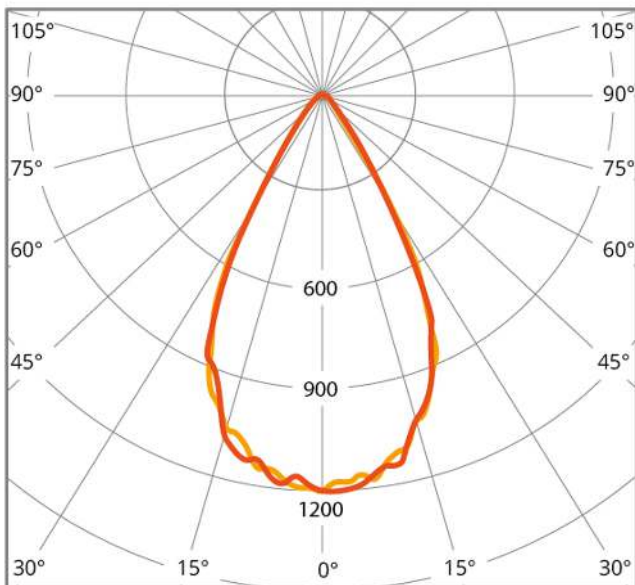


cd/klm    ■ C0 - C180    ■ C90 - C270     $\eta = 99\%$   
**Light distribution curve**

## Features


---

### Resistance and durability

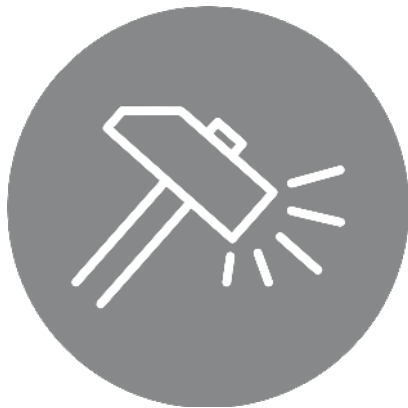

The InnerLED luminaire consists of an extruded and anodised aluminium body that increases its hardness, obtaining an IK10 degree of protection against physical impact. The side covers are made of injected lacquered aluminium and all the screws are made of stainless steel, making it highly resistant to corrosion and guaranteeing its durability.

### Flawless thermal management

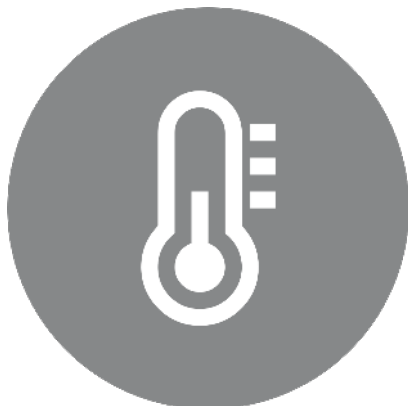


The structure of the InnerLED luminaire consists of an aluminium enclosure with dissipation curves that form part of the chassis itself and favour heat conduction and convection. In addition, the sealed driver and the LED modules are placed in two independent compartments, preventing heat transfer between them. The thermal protection of the electronics maximises the useful life of the luminaire (L90B10 > 100,000h at 25°C) and improves its efficiency (up to 155lm/W).

### Great return on investment



Thanks to its long service life and easy replacement of components, the use of the InnerLED luminaire minimizes maintenance work. This, combined with the high efficiency of LED technology, results in reduced costs and a quick return on the initial investment.

## Suitable for multiple contexts

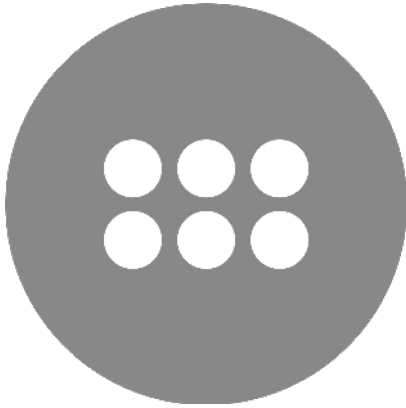

InnerLED is a versatile professional lighting solution, suitable for all types of spaces:

- Multiple options of colour temperatures: 3,000, 4,000, 5,000 and 5,700°K
- Up to 3 different photometric distributions can be defined: S30, S60 and S90
- CRI>70 and available on request CRI>0 and CRI>90
- 1-10V regulation models are available, fully compatible with presence detection and lighting control solutions depending on the needs of the installation

And if you don't find what you are looking for, we have even more options available on request. We are pleased to study your project in a tailored, non-binding way. Contact us, and we will help you choose the perfect lighting.

## Design and manufacture 100% made in Televés



Our edge facilities include all the means for the creation of this luminaire, from start to finish. This involves everything from electronic and mechanical design, through advanced simulation processes, to the manufacture of the circuits, plates and all the chassis elements, through meticulous construction processes and assembly on robotic lines. A proprietary design and manufacturing process also offers other benefits, such as quality verification at every point of development.

## Technical specifications : Ref. 62550000

Number of leds							72
Power	W						130
Pre-programmed dimming							No
Control interface							ON/OFF
Optic type options							S30
Lens type							S90
Color temperature options							S120
Luminous flux	lm						PC lens
Lighting efficiency	lm/W						PC lens
LED current	mA						3000K
Duration	h						4000K
Working life							PC Amber
Constant light output (CLO)							100000
Standard Deviation Colour Matching (SDCM)							L90B10
Color rendering index (CRI)							No
CE Mark							< 3
ENEC Certificate							70
Protection Class IEC							Yes
EU RoHS Compliant							No
IK Rating (light module)							Class I
IK Rating (whole luminaire)							Yes
IP Rating (light module)							10
IP Rating (whole luminaire)							10
Colour							66
Material							65
Fixation Material							Aluminum
Mounting method							Aluminium
Surface facing the wind	m <sup>2</sup>						Suspended
Number of LED modules							0.13
Minimum power factor							6
Lighting source type							0.9500
Replaceable light source							LED
Cable							Yes
Power consumption tolerance	%						Yes
Lighting flux tolerance	%						Yes
Electric connection							3-pole waterproof connector
Inrush current	A						65
Input voltage Max	Vac						240
Input voltage Min	Vac						220
Mains frequency							50 Hz
Total harmonic distortion (THD)							20
Max. Operating temperature	°C						40
Min. Operating temperature	°C						-35