

CXT 18C coaxial cable Dca Euroclass

Ref.	214210
EAN13	8424450278246

Other features

Colour	White
Dispenser	Without dispenser
Length	100.00 m

Packaging info

Coil	100 m
Pallet	6000 m

Physical data

Net weight	38.00 g
Gross weight	40.00 g
Width	7.00 mm
Height	1,000.00 mm
Depth	7.00 mm
Main product weight	38.00 g

Discover

Double-shielded Class B coaxial cable

They provide two shielding layers and belong in EN 50117 standard Class B, according to their structural properties:


- For 5 MHz - 30 MHz => TI < 15 mΩ/m
- For 30 MHz - 1000 MHz => SA > 75 dB
- For 1000 MHz - 2000 MHz => SA > 65 dB
- For 2000 MHz - 3000 MHz => SA > 55 dB

Where the transfer impedance (TI) defines how effective the shielding is at low frequencies, while the shielding attenuation (SA) defines it in the 30 MHz-to-3000 MHz range.

Mounting details

DETAIL VIEW OF THE COAXIAL CABLE SECTION

- A**-Inner conductor
- B**-Dielectric
- C**-Foil
- D**-Braid
- E**- Anti-migrating film
- F**-Outer sheath

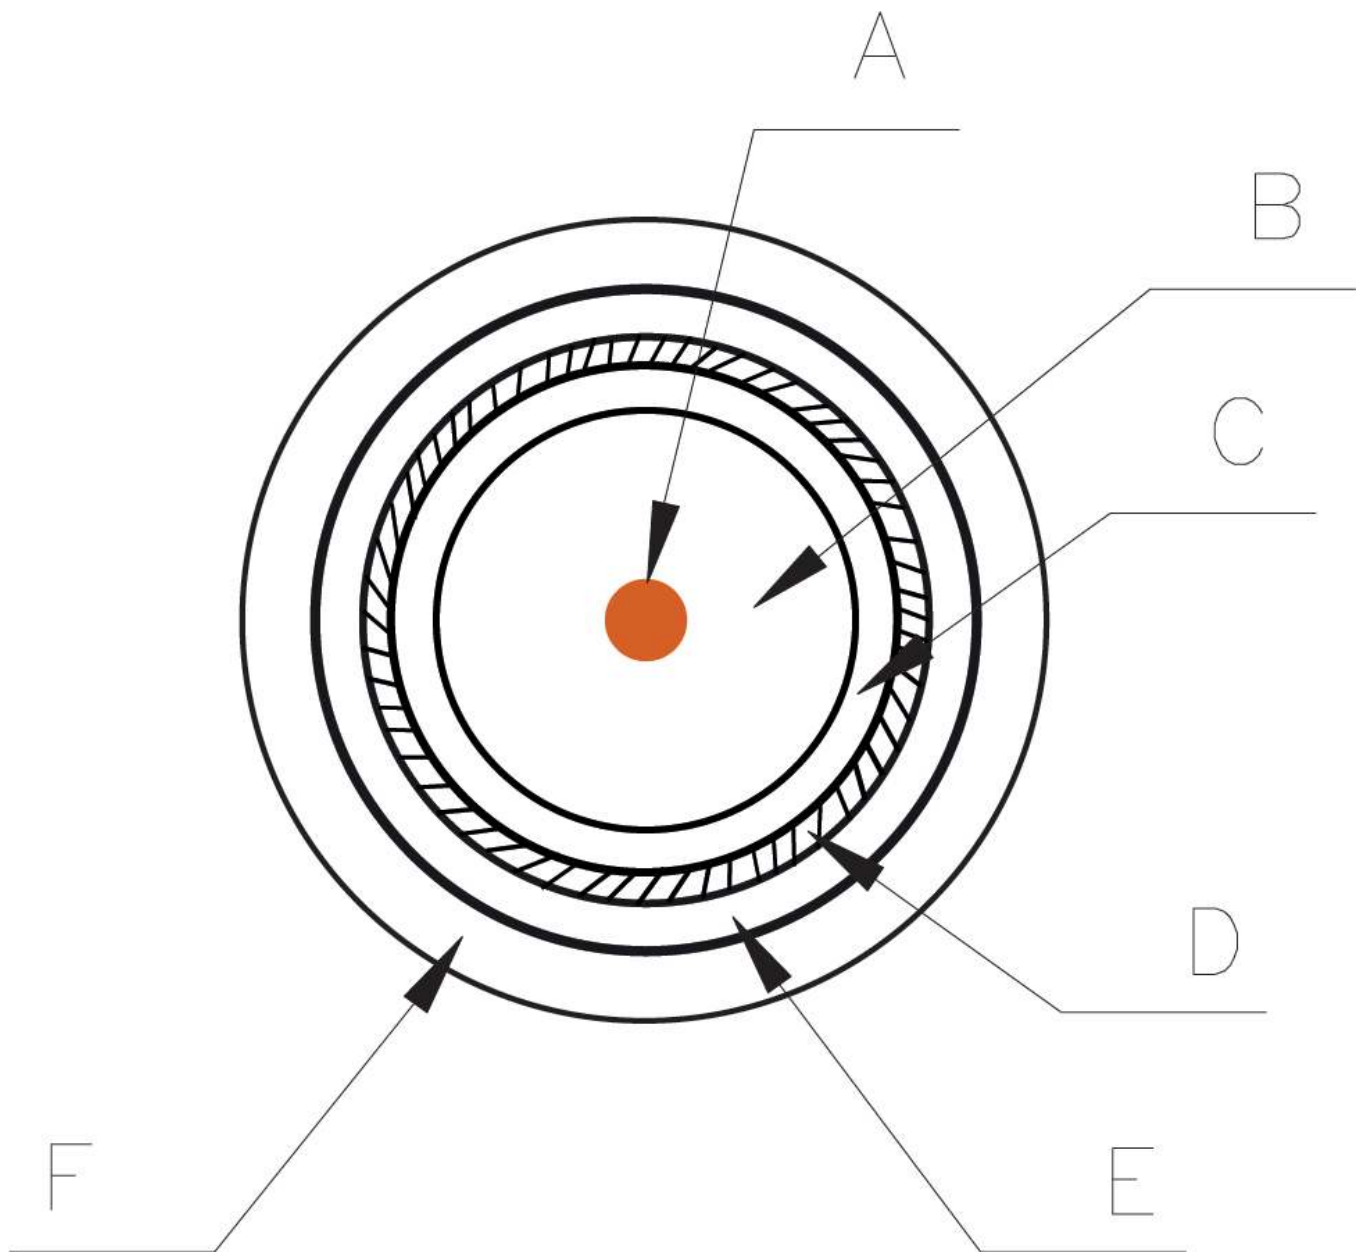

CABLE UNWINDING PROCESS

1. Place the cable with the label side down
2. Cut out the plastic in the central hole only*
3. Cut out the zip ties
4. Pull the cable by the end placed in the center hole
5. Stack with the label side down to protect the cable

**(Keep the surrounding plastic intact to avoid the cable unroll)*



