



"F" domestic amplifier, Sky pass 2 inputs / 4 outputs: VHF/UHF + Return channel.

Domestic amplifier equipped with 2 inputs and 4 outputs with return channel to allow sending the commands from the remote control (infrared) of the Sky receiver. Allows for the distribution of the tuned channel to all of the domestic outlets and its control from any outlet via the remote control.

Ref.	5517
EAN13	8424450055175

Packaging info

Box	1 pcs.
Carton	5 pcs.
Bucket	50 pcs.

Physical data

Net weight	324.00 g
Gross weight	400.00 g
Width	146.00 mm
Height	64.00 mm
Depth	35.00 mm
Main product weight	214.00 g


Highlights

- Low-impact visual design and limited size
- Integrated high-performance switched-mode power supply (40% less than a standard amplifier)
- Fully automated manufacturing subject to the most stringent quality controls

Main features

- Separate VHF/Radio inputs and Sky receiver signal
- Infrared transmitter signal for the remote control of a Sky receiver
- "IR Eye" powering is carried out via the amplifier outputs
- Can be wall-mounted using screws
- "F" connectors

Application example

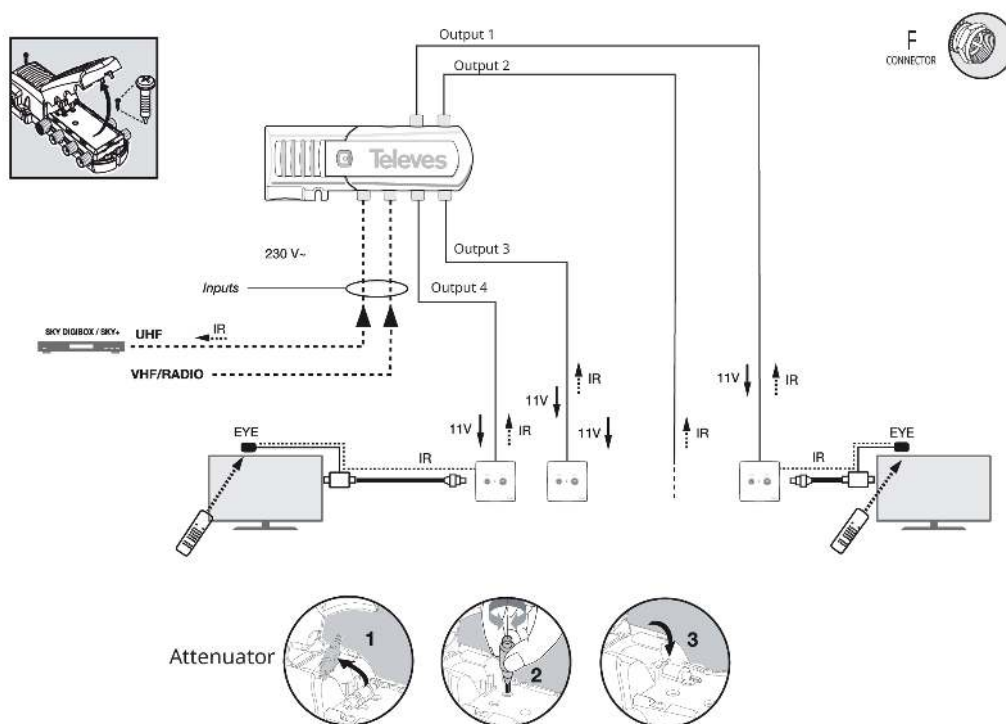

Technical specifications : Ref. 5517

Number of outputs			4
TV output			No
Frequency range	MHz	5 ... 30	47 ... 862
Gain	dB	6	16
Gain adjustment range	dB	--	0 ... 12
Output level DIN45004B	dBµV	--	> 105
Noise figure	dB	--	4.5
Input voltage	Vac		196 ... 264
Mains frequency			50 Hz / 60 Hz
Max. current	mA		23
Max. power consumption	W		2.3
Operating temperature	°C		-5 ... 45
Protection index (IP)			20