



## Top Tray with 2 fans for Rack 19" - 600mm depth, 390m<sup>3</sup>/h

2-fan tray that is installed on the top of a rack cabinet to force the cooling of the structure. This creates an air stream inside the cabinet, facilitating heat dissipation from the electronic components installed inside and maintaining a suitable temperature range.

Mounted on a square structure, it is compatible with 19" floor standing racks 600x600mm. It includes screws for fixing.

<b>Ref.</b>	533175
<b>Logical ref.</b>	MSR-L600
<b>EAN13</b>	8424450237649

### Packaging info

<b>Box</b>	1 pcs.
------------	--------

### Physical data

<b>Net weight</b>	2,242.00 g
<b>Gross weight</b>	2,816.00 g
<b>Width</b>	451.00 mm
<b>Height</b>	40.00 mm
<b>Depth</b>	365.00 mm
<b>Main product weight</b>	2,242.00 g

### Highlights


- Two fans with a powerful air flow: 390 m<sup>3</sup>/hour

- Simple installation: screws are supplied for the installation of the fan
- Resistant tray made of 1mm thick steel
- Connector: IEC C14
- Dimensions (W x D x H): 451mm x 365mm x 50mm

## Mounting details

---

Fans are located in a screwed tray at the top of the rack, in this way they extract the hot air released by the equipment inside the rack and expel it through the slits at the top. Thus, the fans force air circulation, the new one entering through the bottom of the cabinet.

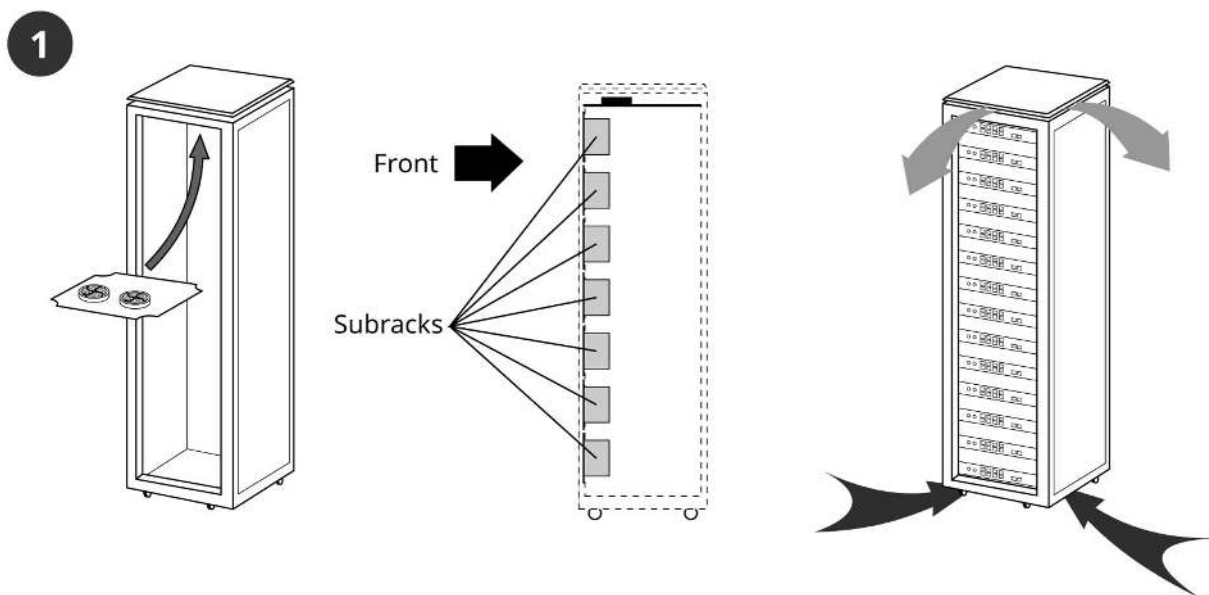

## Technical specifications : Ref. 533175

Number of fans		2
Voltage max.	Vac	240
Input voltage	Vac	220 ... 230
Mains frequency		50 Hz / 60 Hz
Max. current 1 fan	A	0.08
Max. current 2 fan	A	0.16
Max. power consumption	W	36
Installation type		Ground / Ceiling
Protective housing		Yes
Air flow	m <sup>3</sup> /h	390
Noise emission	dBA	56