



## NevoSwitch equipped with 5 QUAD inputs and 6 outputs

### When quality matters

Cascadable and quad-compatible multiswitch, equipped with 5 inputs (one terrestrial, and the four polarities of one satellite) and 6 user outputs. Can be used as a terminal (star topology) or as a cascade by using a simple switch.

<b>Ref.</b>	714402
<b>Logical ref.</b>	MS56NCQ
<b>EAN13</b>	8424450172858

### Packaging info

<b>Box</b>	1 pcs.
------------	--------

### Physical data

<b>Net weight</b>	488.00 g
<b>Gross weight</b>	488.00 g
<b>Width</b>	137.00 mm
<b>Height</b>	121.00 mm
<b>Depth</b>	29.00 mm
<b>Main product weight</b>	366.00 g

### Highlights

- 12 V power supply (ref. 9916) included
- A 22 kHz tone can be generated, which makes it compatible with any LNB, including QUAD LNB.
- A switch for either powering terrestrial pre-amplifiers or allowing current circulation

- Remote power feeding using VL
- DC circulation from the inputs up
- Active terrestrial
- European design, quality, and manufacturing


## Main features

---

- Very compact
- Made of zamak
- Input and output colour identification
- Available ECO mode
- Selector switch to shift between cascade and terminal modes
- 12 V power supply
- Low power consumption

## Application example

---

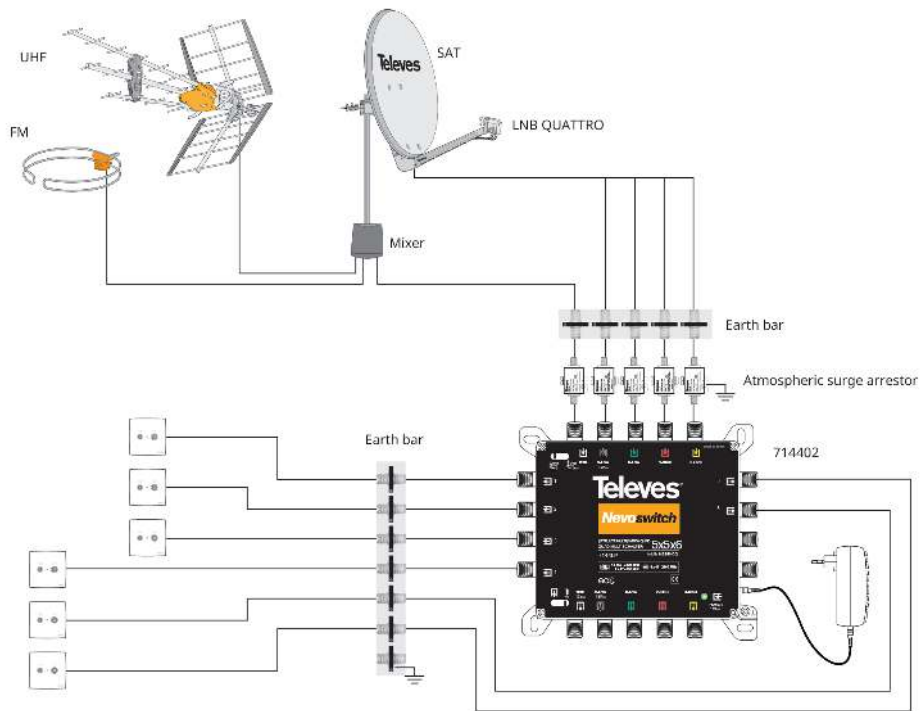

## Technical specifications : Ref. 714402

Number of inputs		5
Number of cascable outputs		5
Number of user outputs		6
Frequency range TERR.	MHz	47 ... 862
Frequency range SAT.	MHz	950 ... 2400
Input level TERR.	dBµV	92
Input level SAT.	dBµV	105
Through losses TERR.	dB	2
Through losses SAT.	dB	1.5 ... 4
Tap losses 1...8 TERR.	dB	2
Tap losses 1...8 SAT.	dB	1
Isolation H/V	dB	> 30
Isolation users	dB	> 25
Powering	Vdc	12
Max. current (PSU)	mA	40
Max. current (STB)	mA	35
Operating temperature	°C	-5 ... 45
Protection index		20